


# WEWA-TV 10.1" (25,65 cm) PCAP Industrie Touchscreen-Monitor

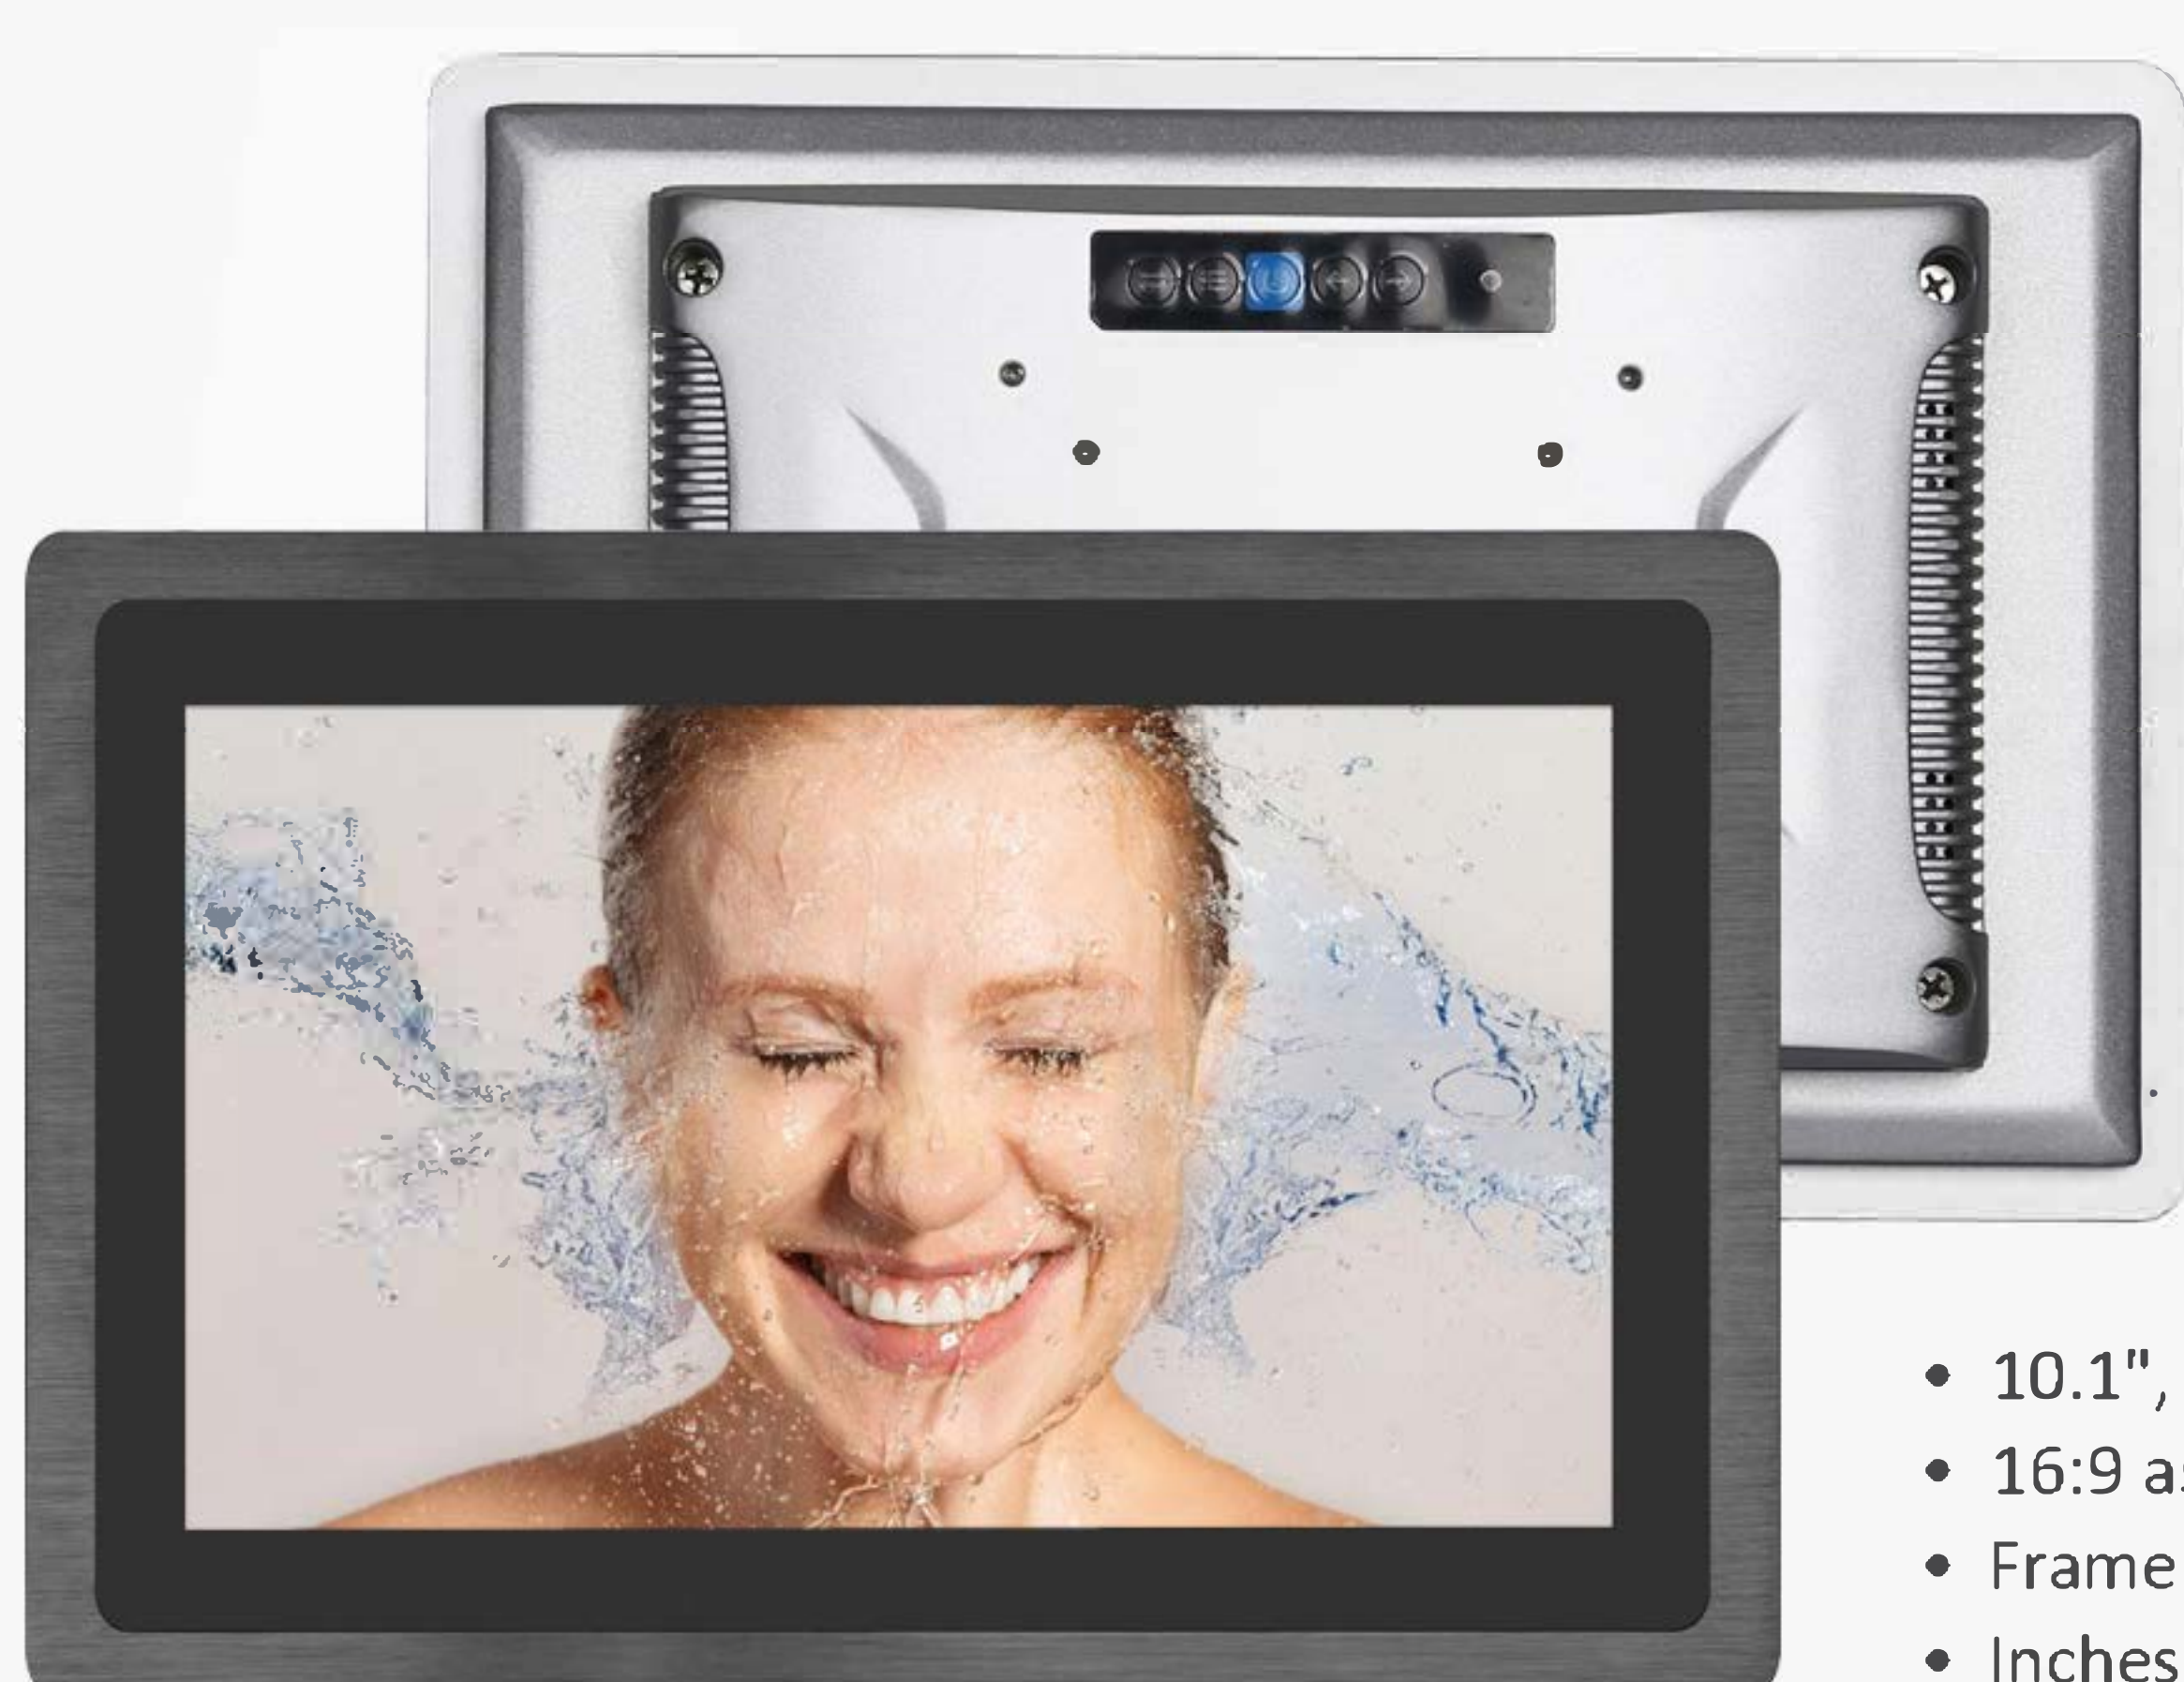

Waterproof Full Flat IP65 Seamless Front

**WEWA AG**  
WEWA-TV®  
get in touch

- 10.1", 1366x768
- 16:9 aspect ratio
- Frame: Industrial Grade Aluminium Alloy
- Inches Available: 10.1 inch to 21.5 inch
- Color: Balck or Silver
- OEM, ODM, Customized Service Available
- Item number: WT0101TMWPCAPNW

## Feature



- OSD, Power Button
- Embedded Holes
- Excellent Heat Dissipation Design
- VESA Holes(75\*75mm;100\*100mm)



## Interfaces

Support VGA,HDMI,DVI Automatic Identification Signal Channel




- RJ45 Touch Input
- HDMI
- DVI
- VGA
- Audio I/O
- Anti-drop DC
- Customized Interface
- BNC Video Interface
- COM
- Aviation Power Interface

## Touch Type

Front Panel IP65 Design, Water and Dust Proof



## Dimension

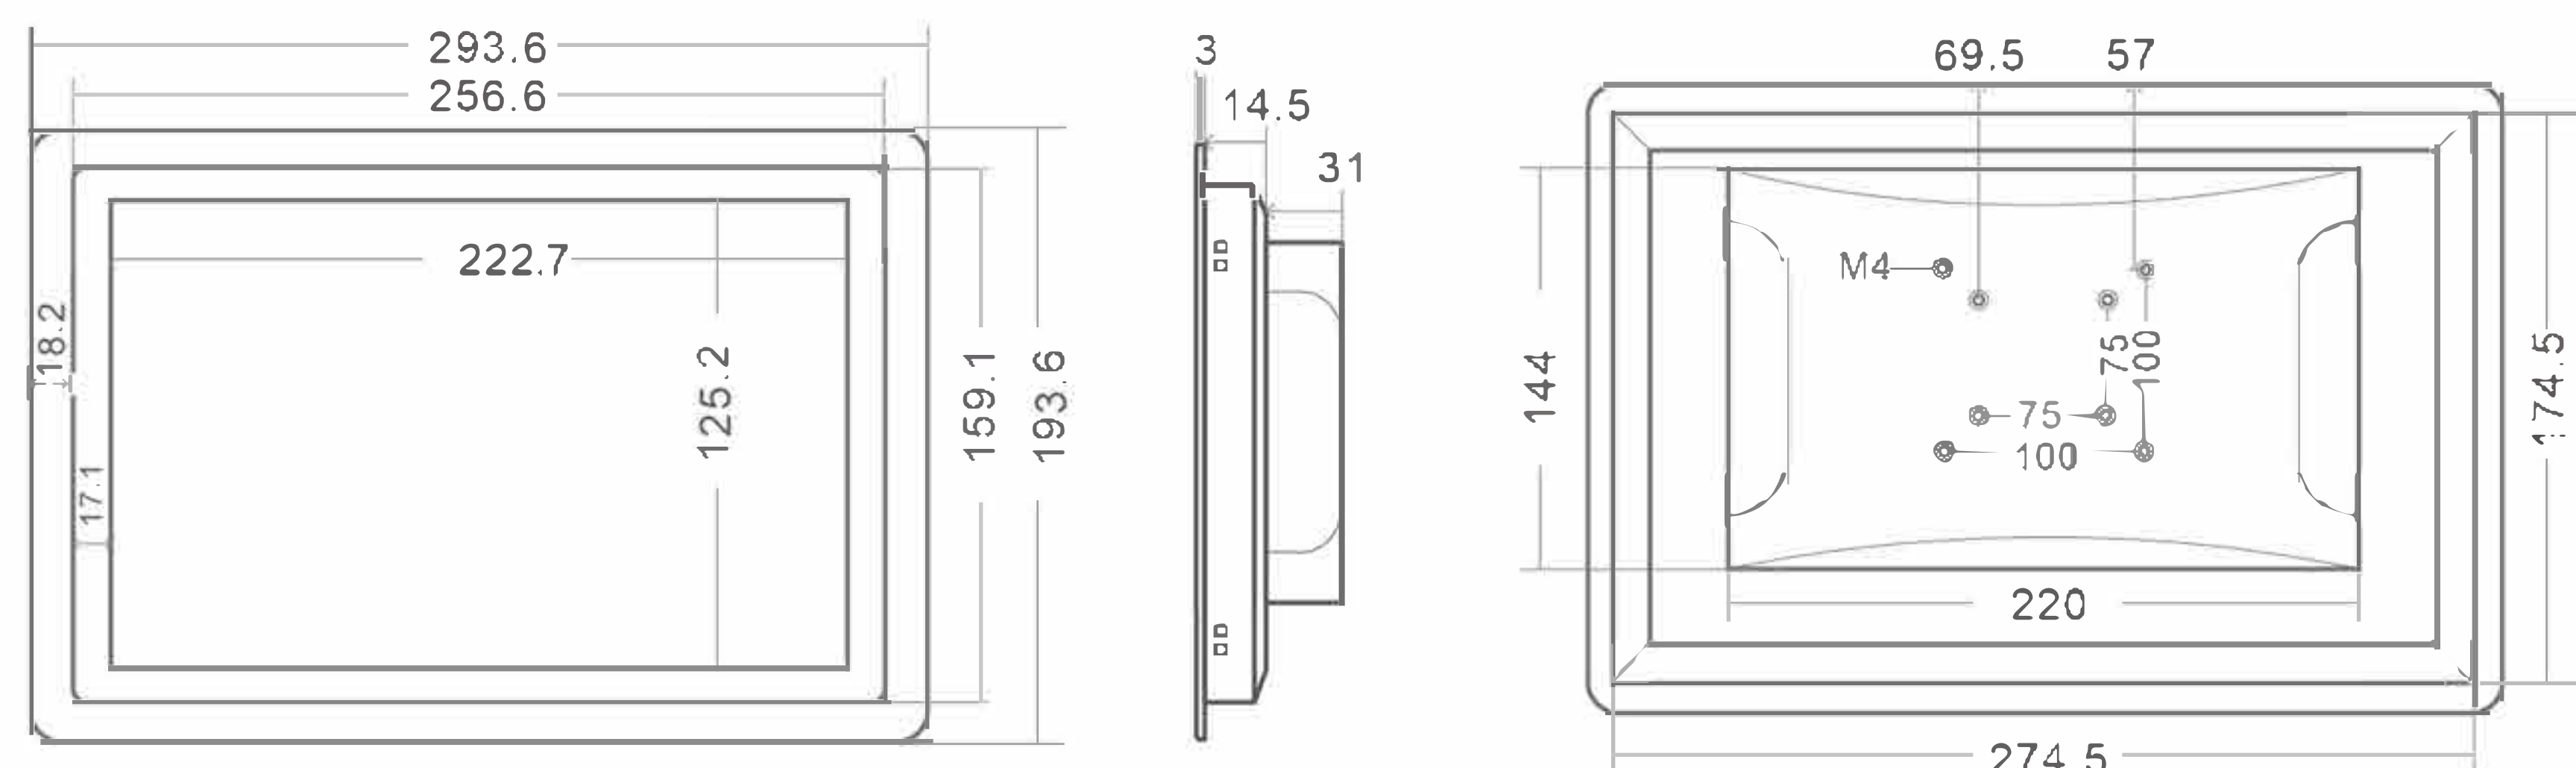

## Installation



Embedded With Buckles(Default)



Folding Bracket Stand(Optional)



Wall Hung Kits(Optional)



Match VESA ARM(Optional)

<b>General Info</b>	Item No.	WT0101TMWPCAPNW
	Material	Aluminum Alloy
	Color	Black/Silver
	IP Rating	IP65, Indoor&Outdoor Complied
	Weight	3.2 KG
	Certificate	CE ROHS
	Warranty	2 Years
	Avalability of Customization	Yes
<b>Screen Info</b>	Screen Size	10.1 inches with Bezel 3mm
	Resolution	1366*768
	Proportion	16:9
	Gray-scale Response Time	5ms
	Panel Type Industrial	Control A style TFT
	Point Distance	0.264mm
	Contrast	1000:1
	Backlight Type	LED,Lifespan≥50000h
	Display Color	16.7M
	Visual Angle	160°/160°
	Brightness	400cd/m2
	Touch Type	Capacitive,Resistive and Infrared Optional
	Touches Cycles	≥50 Million Times
	<b>Interface Info</b>	Signal Interface
Touch Interface		Ethernet to act as USB for touch
Other Interfaces		Audio Input and Output
Power Connector		DC with Ring Attachment (Optional DC Terminal Block)
<b>Power Info</b>	Power Supply	External Power Adapter 100-240V, 50-60HZ
	Monitor Input Voltage	12-24V
	Monitor Power	≤35W
	Dustproof and Waterproof	Front Panel IP65 Dustproof and Waterproof
	Installation Method	Embedded,Desktop,Wall-mounted,VESA ARM Optional
	Ambient Temperature	<80%,Non-condensable
	Working Temperature	-20°C~70°C
Language Menu	Chinese,English,German,French,Korean, Spanish,Italian,Russian,Customized	