

WEWA-TV 12.1" (30,71 cm) PCAP Industrie Touchscreen-PC



Waterproof Full Flat IP65 Seamless Front

WEWA AG
WEWA-TV
get in touch

- 12.1"; 800x600 (4:3) , Optional 1024x768
- Intel Celeron Quad-core J1900, Optional i3/i5/i7
- 2G DDR3 RAM (Up to 4G/8G)
- 32G SSD (Up to 64G/128G/256G/500G)
- OS: Windows 7/8/10, Linux Optional
- 3mm Ultra Thin Front Bezel, Aluminum Alloy Enclosure
- Item number: WT0121TPCAPNW

☀ **Optional: Sunlight Readable(1000cd/m² Brightness)**

Feature



- WIFI (2.4G)
- Power Button
- Embedded Holes
- Waterproof Speaker Hole
- Excellent Heat Dissipation Design
- VESA Holes (75*75mm, 100*100mm)

OEM/ODM:
Enclosure Size
Whole Waterproof
5G WIFI



Interfaces



OEM/ODM:
2~8 *COM (RS232/RS485/RS422)
2*LAN (RJ45)
GPIO/LPT/Msata/Mini-PCle

24V Power Supply

Industrial Ports

Touch Type



Front Panel IP65 Design, Water and Dust Proof

5-Wires
Resistive Touch
(One Point)
Life ≥35 million times

PCAP Touch
(Ten Point)
Life ≥50 million times



Dimension

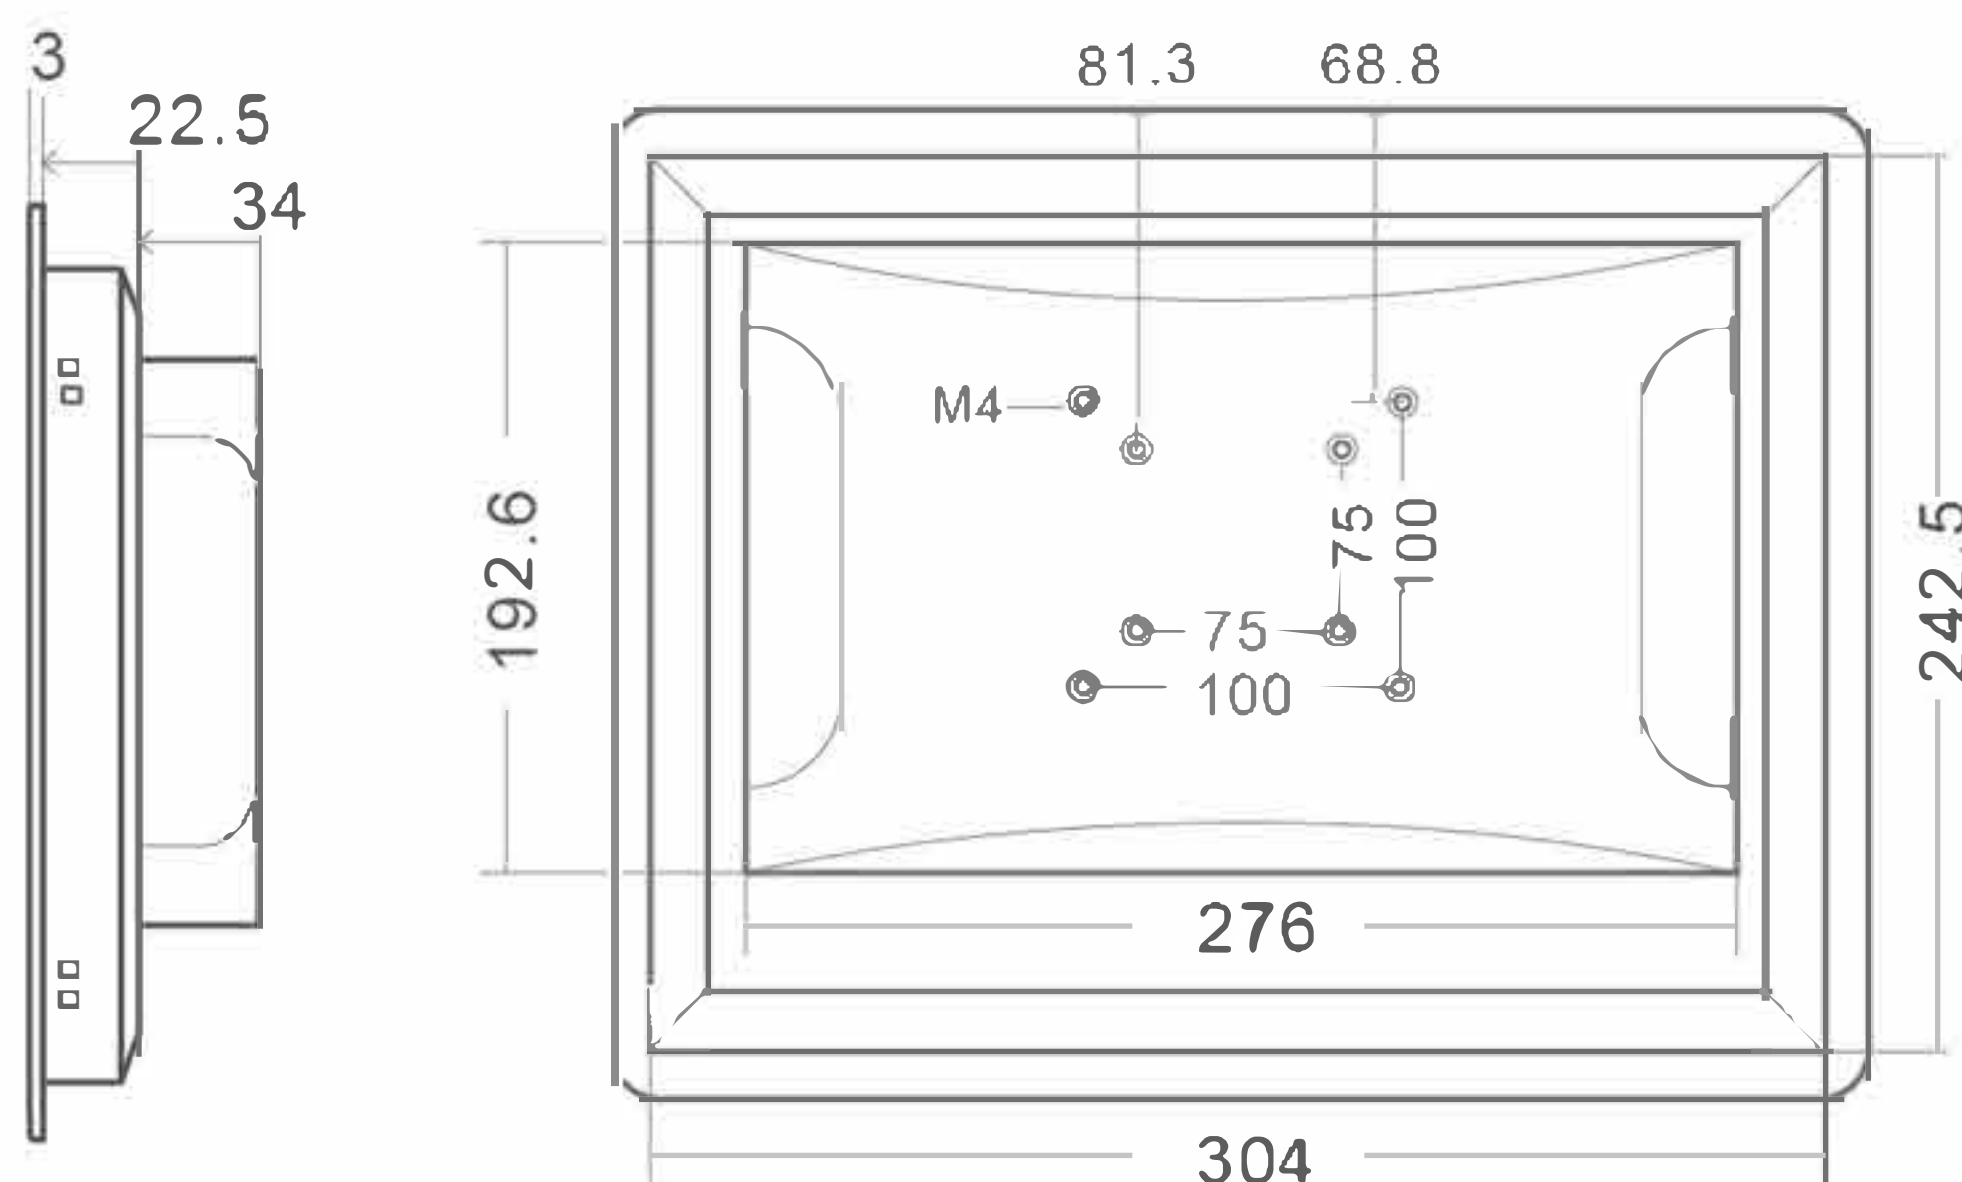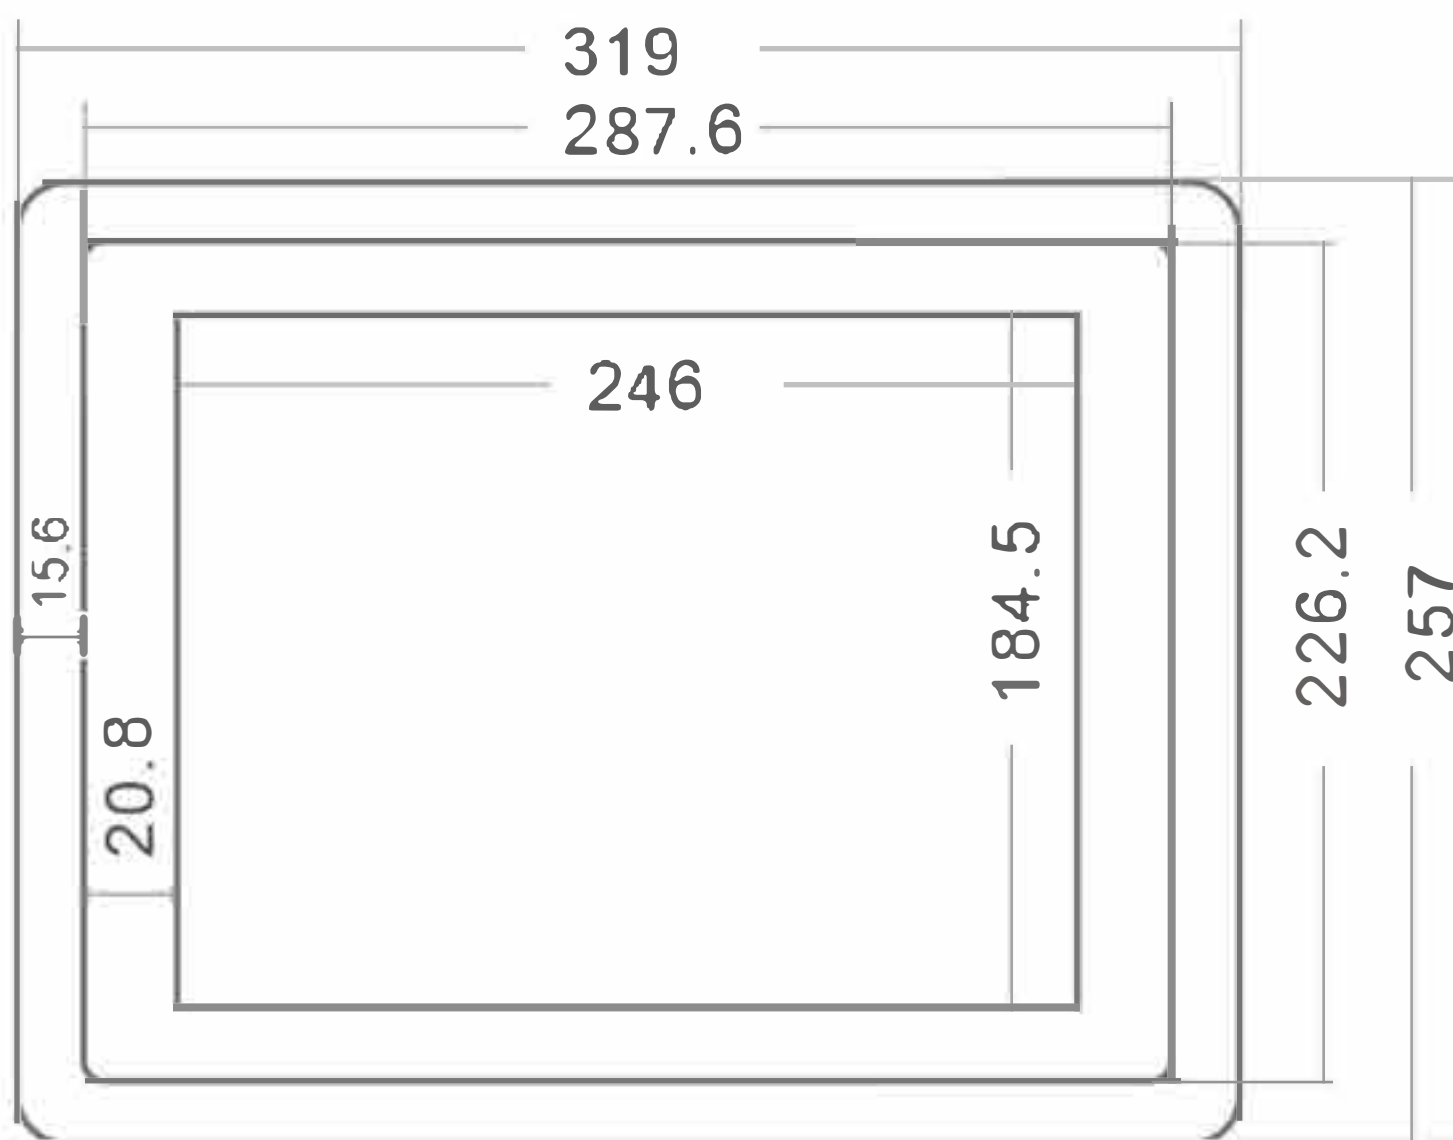

Installation



Embedded With Buckles(Default)



Folding Bracket Stand(Optional)



Wall Hung Kits(Optional)



Match VESA ARM(Optional)

Specification

Display	Panel Type	TFT LED (A+ grade)
	Screen Size	12.1 inch
	Housing Material	Aluminum Alloy Enclosure
	Screen Ratio	4:3
	Resolution	800x600, optional 1024x768
	Contrast	1000:1
	Display Colors	16.7 M
	Brightness	400cd/m ² (1000cd/m ² for Customized)
	Screen Pixel Pitch	0.264 mm
	Viewing Angle	(H)160 x (V)160
	Touch Screen Type	No Touch/Resistive Touch/Capacitive Touch
Response Time	5ms	
LED Backlight Lifespan	50,000 h	
Color	Silver or Black (Can Customized)	
Motherboard	CPU	Intel Celeron Quad-core J1900 2.0 GHz, Optional i3/i5/i7
	RAM	2G DDR3, Optional Up to 4G/8G
	SSD	32G SDD , Optional Up to 64G/128G/256G/500G
	HDD	500GB/1TB HDD (Optional)
	WiFi	Built-in, 802.11a/b/g/n
	I/O	12V Power Adapter x1/USB2.0 x4/Internet Access x1/HDMI x1/VGA x1/Audio IO x1/COM x2 (Can Customized)
Others	OS	Windows 7/8/10, Linux
	Power Supply	External 12V/5A Power Adapter
	Power Consumption	≤ 45W
	Temperature	Operation: -10°C~60°C, Transportation & Storage: -20°C~60°C
	Humidity	Operation: 40%~65%, Transportation & Storage: 35%~80%
	Installations	Default: Embedded with Buckles Optional: Wall Hung Kits/Desktop Stand/Folding Bracket Stand/VESA Mounted
	Certificates	CE/FCC/RoHS
Warranty	2 Year	
Accessories	Power Adapter/Embedded Clips/Manual	