


WEWA-TV 19" (48,26 cm) PCAP Industrie Touchscreen-Monitor

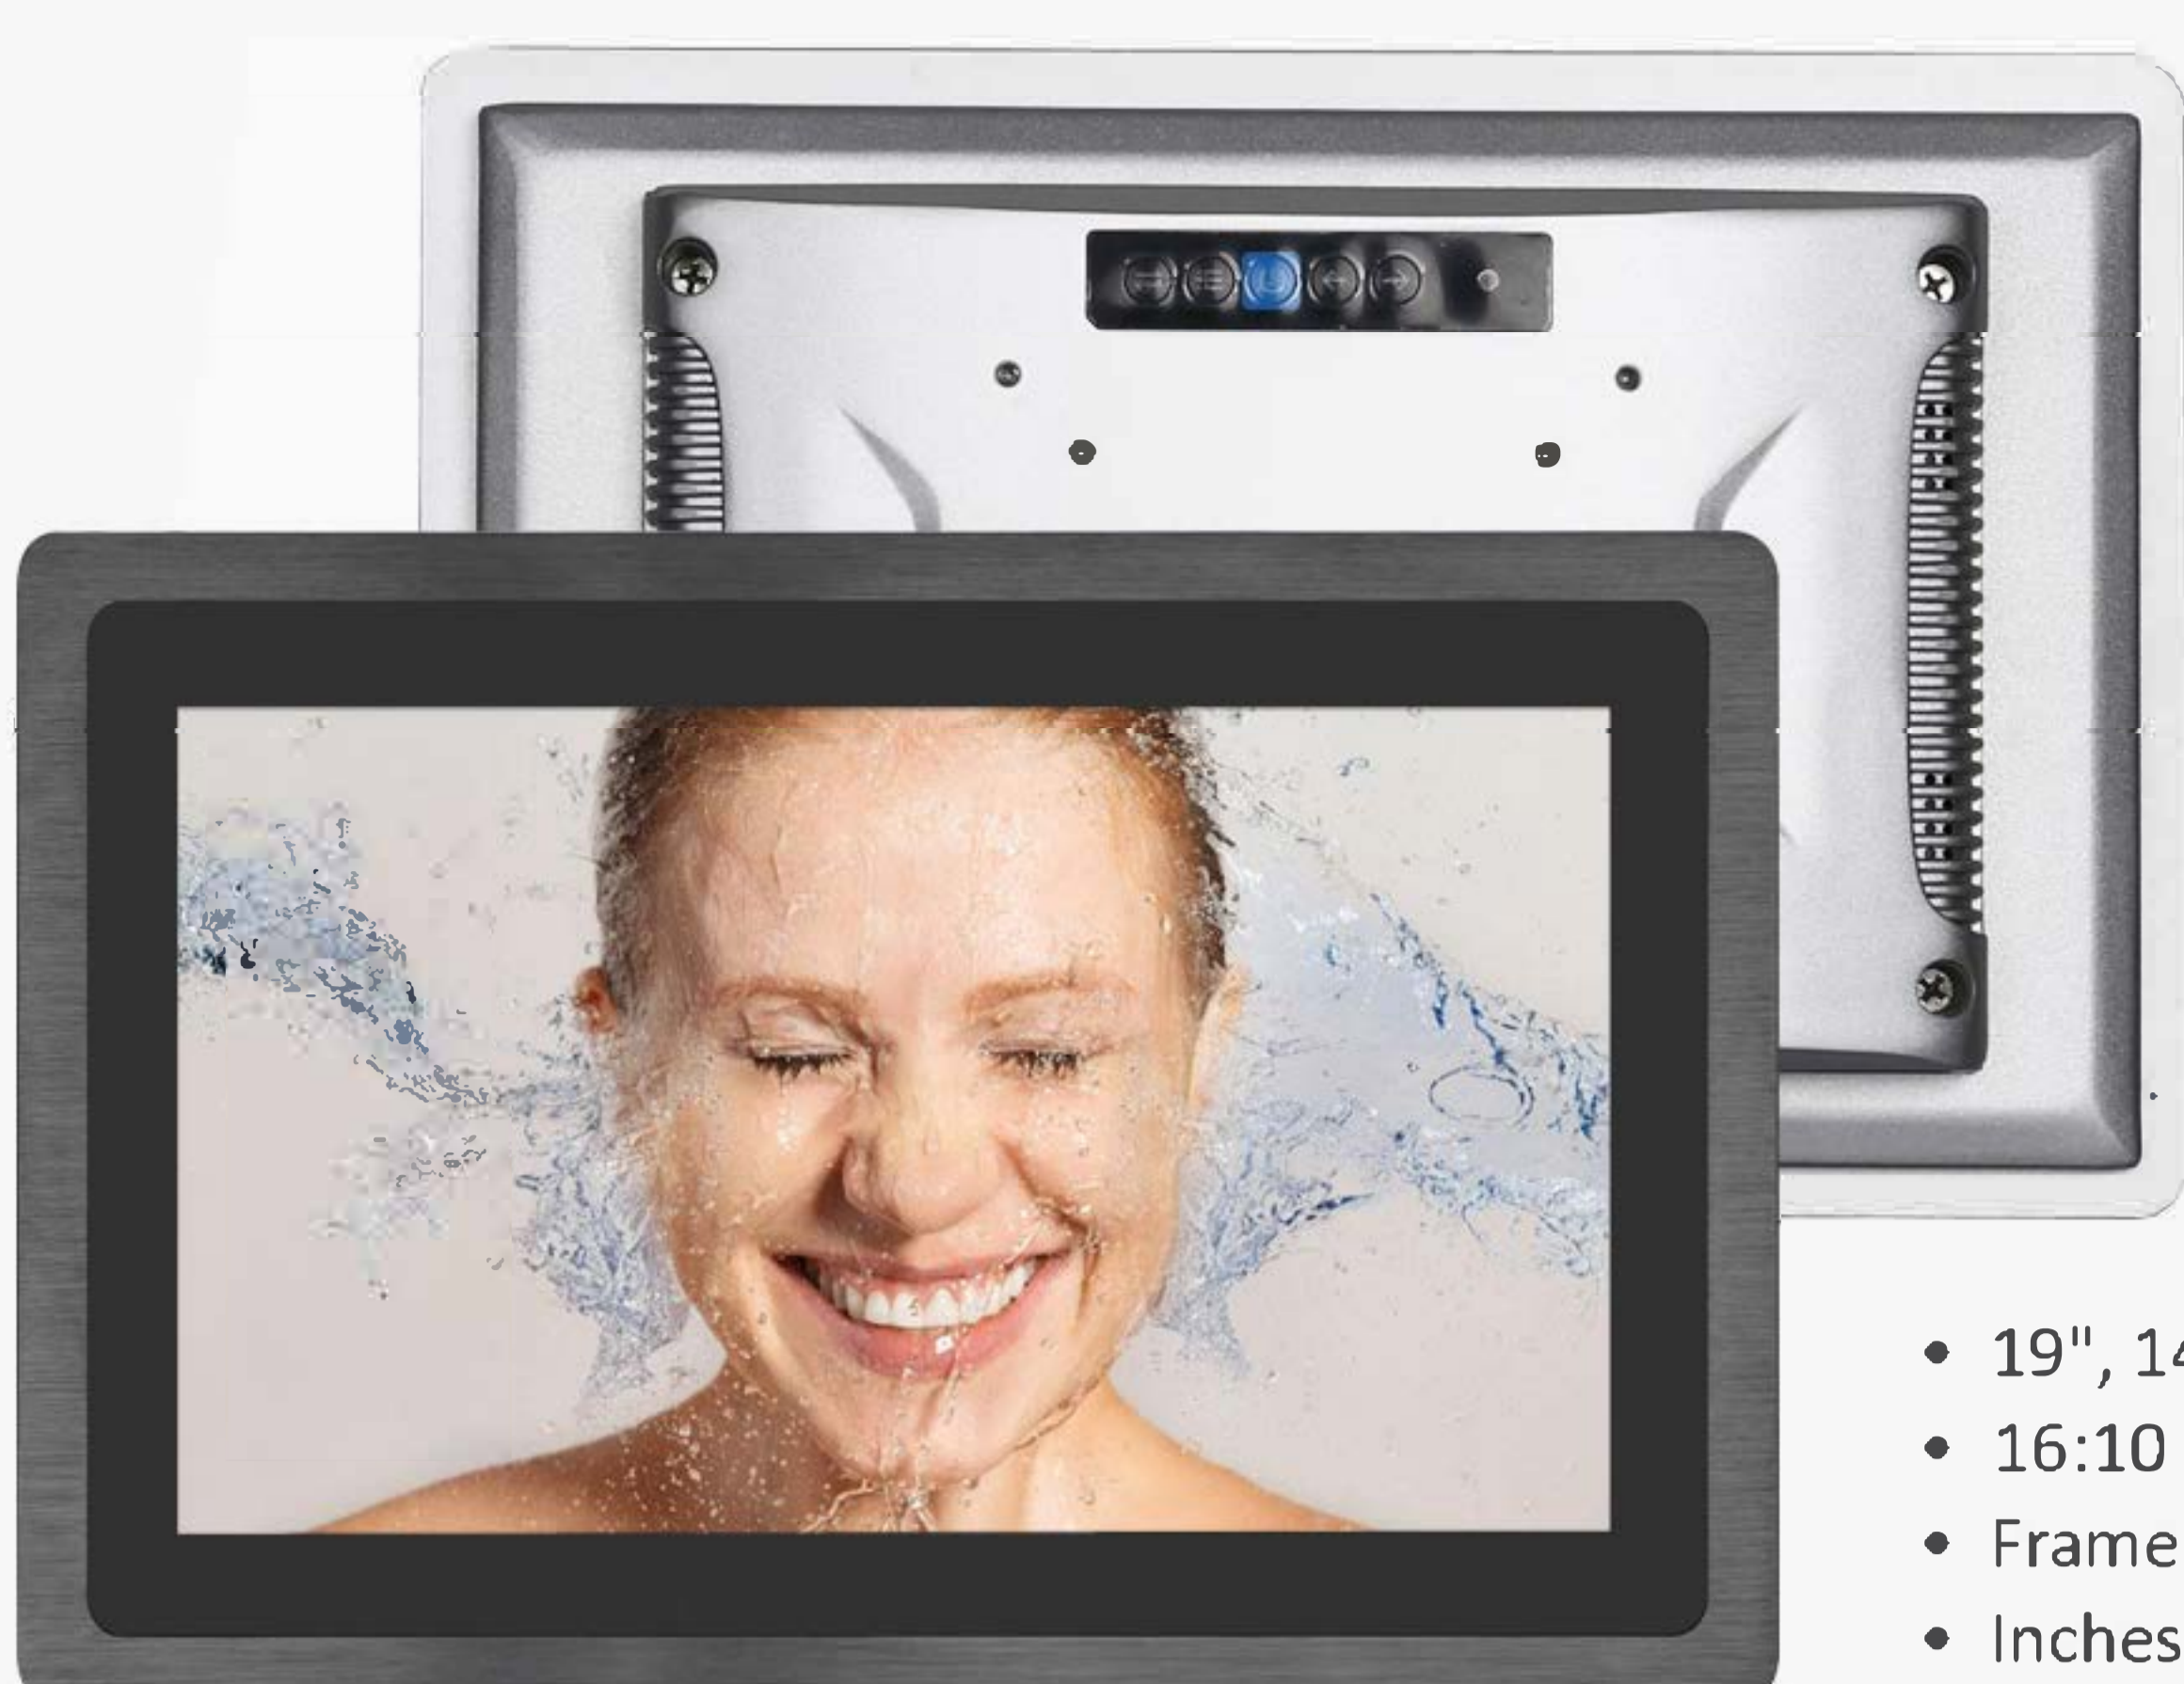

Waterproof Full Flat IP65 Seamless Front

WEWA AG
WEWA-TV[®]
get in touch

- 19", 1440x900
- 16:10 Aspect Ratio
- Frame: Industrial Grade Aluminium Alloy
- Inches Available: 10.1 inch to 21.5 inch
- Color: Black or Silver
- OEM, ODM, Customized Service Available
- Item number: WT0190TMWPCAPNW

☀ Optional: Sunlight Readable(1000cd/m² Brightness)

Feature



- OSD, Power Button
- Embedded Holes
- Excellent Heat Dissipation Design
- VESA Holes(75*75mm;100*100mm)



Interfaces

Support VGA,HDMI,DVI Automatic Identification Signal Channel



- RJ45 Touch Input
- HDMI
- DVI
- VGA
- Audio I/O
- Anti-drop DC
- Customized Interface
- BNC Video Interface
- COM
- Aviation Power Interface




Touch Type

Front Panel IP65 Design, Water and Dust Proof

- 5-Wires Resistive Touch (One Point)
Life ≥35 million times
- PCAP Touch (Ten Point)
Life ≥50 million times



Dimension

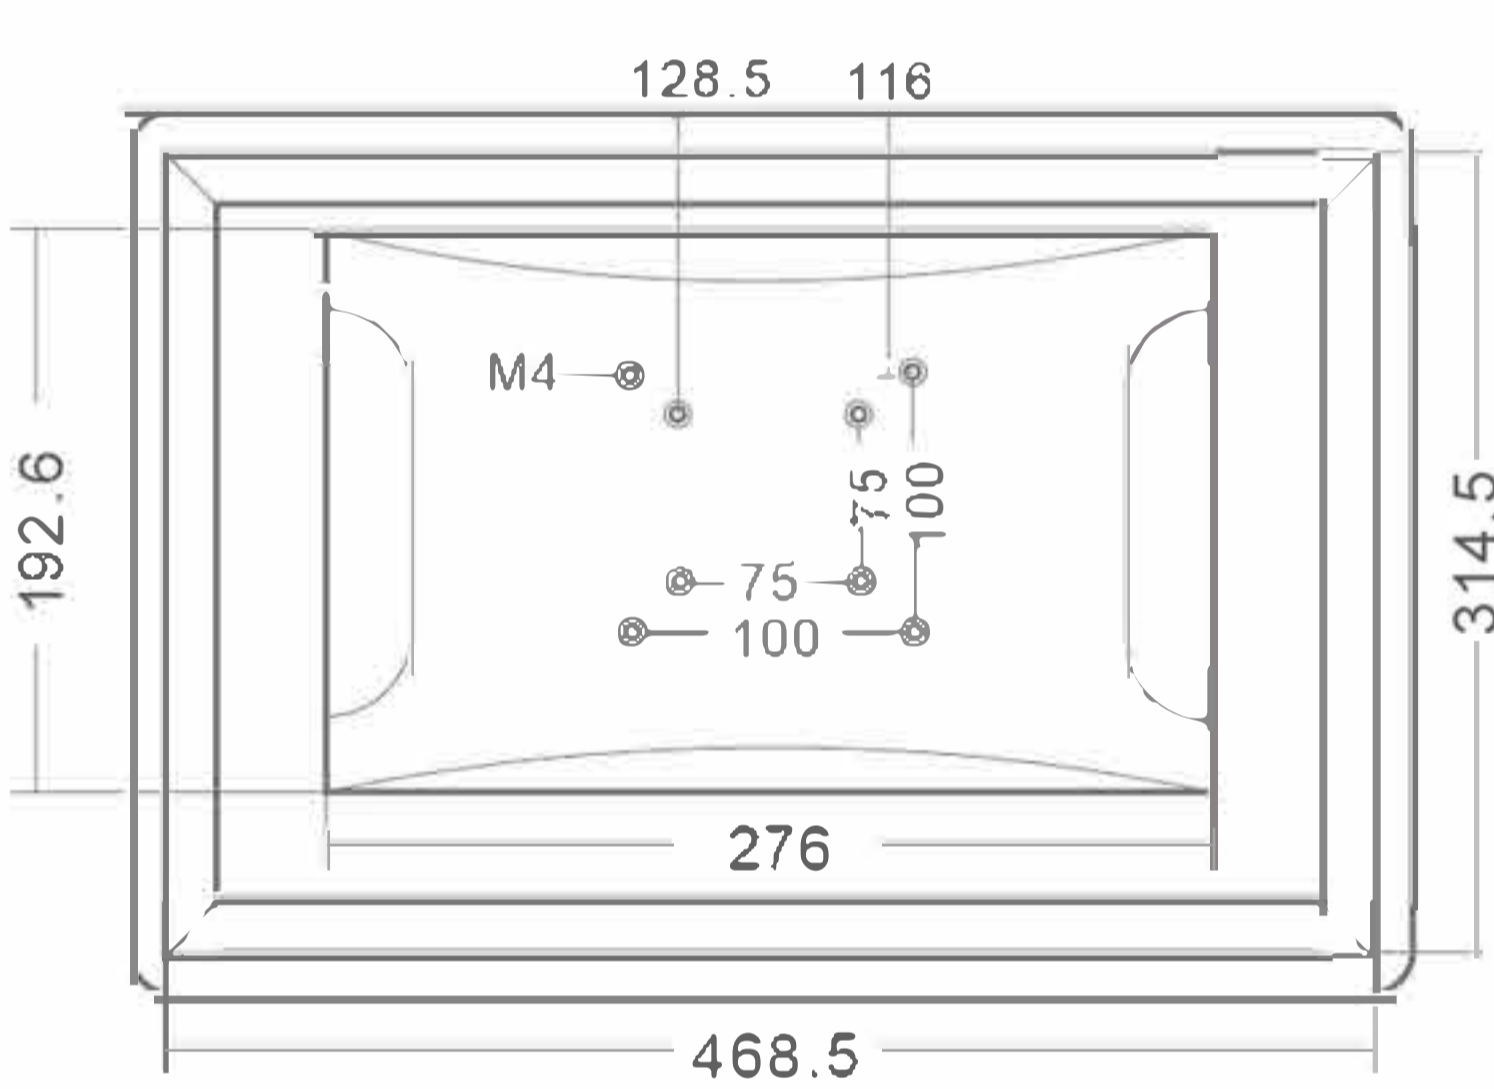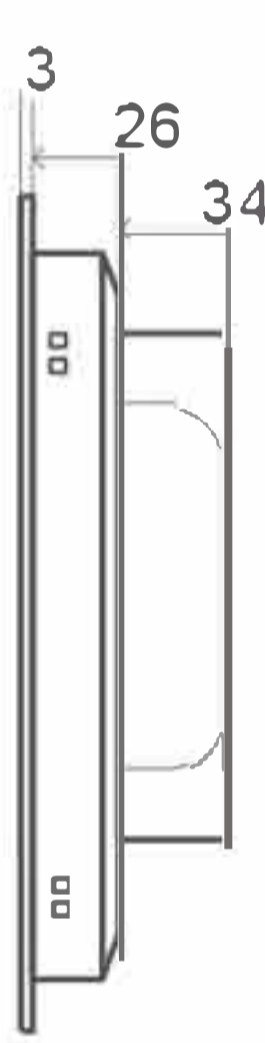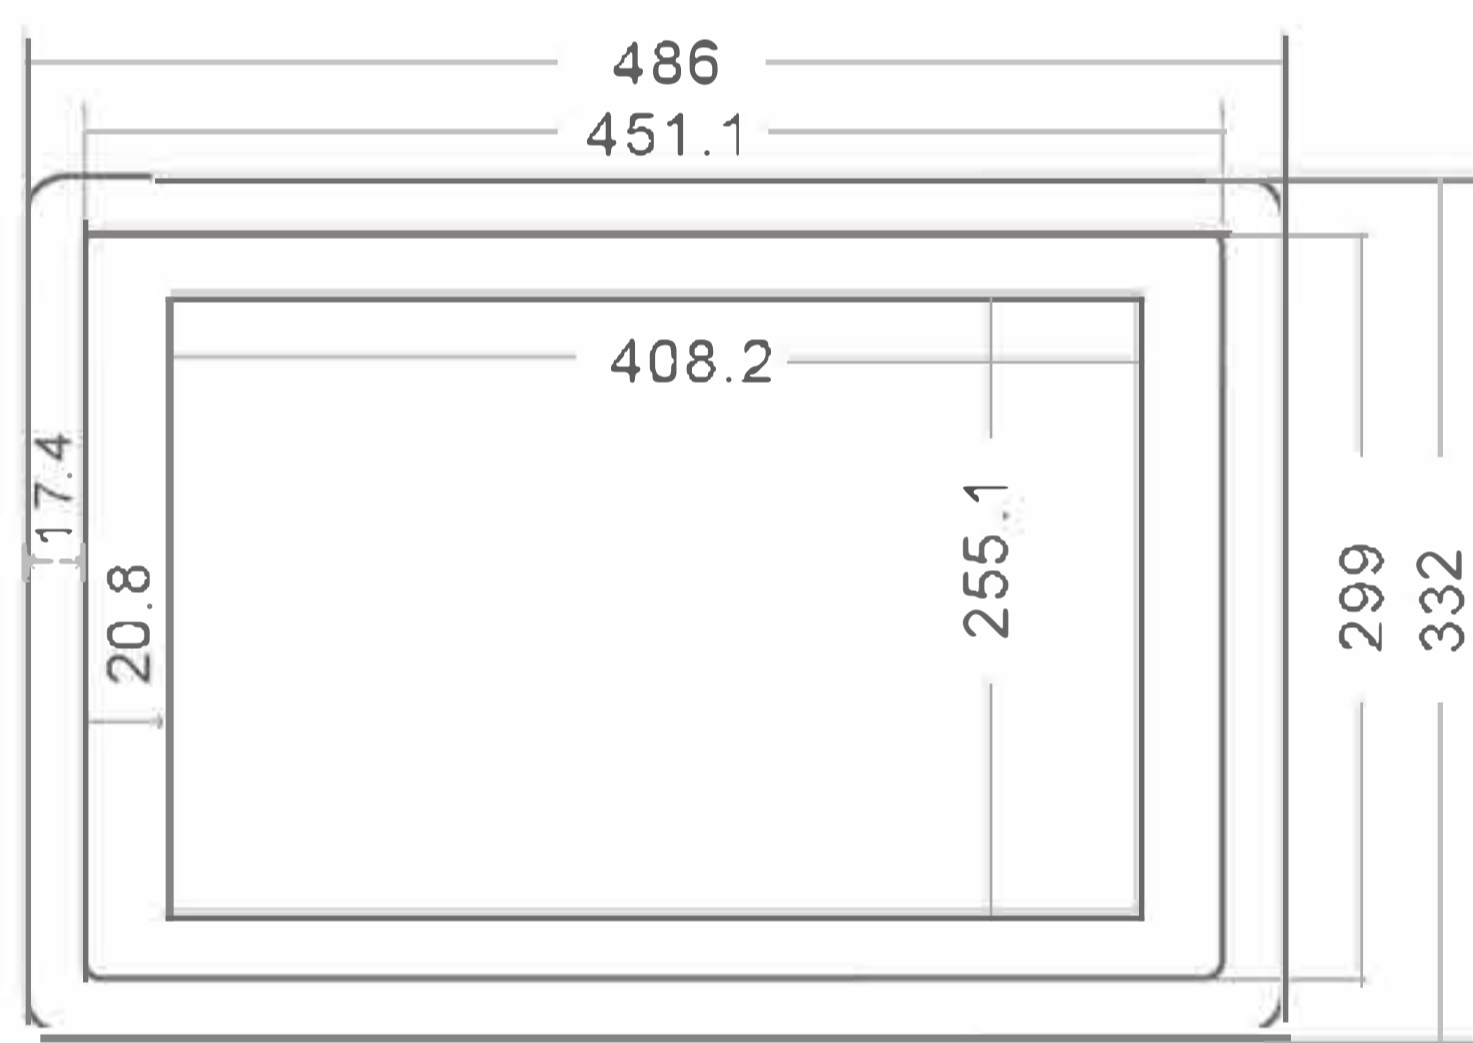

Installation



Embedded With Buckles(Default)



Folding Bracket Stand(Optional)



Wall Hung Kits(Optional)



Match VESA ARM(Optional)

| | | |
|---------------------|--|--|
| General Info | Item No. | WT0190TMWPCAPNW |
| | Material | Aluminum Alloy |
| | Color | Black/Silver |
| | IP Rating | IP65, Indoor&Outdoor Complied |
| | Weight | 7 KG |
| | Certificate | CE ROHS |
| | Warranty | 2 Years |
| | Avalability of Customization | Yes |
| Screen Info | Screen Size | 19 inches with Bezel 3mm |
| | Resolution | 1440*900 |
| | Proportion | 16:10 |
| | Gray-scale Response Time | 5ms |
| | Panel Type Industrial | Control A style TFT |
| | Point Distance | 0.264mm |
| | Contrast | 1000:1 |
| | Backlight Type | LED,Lifespan≥50000h |
| | Display Color | 16.7M |
| | Visual Angle | 160°/160° |
| | Brightness | 400cd/m ² |
| | Touch Type | Capacitive,Resistive and Infrared Optional |
| | Touches Cycles | ≥50 Million Times |
| | Interface Info | Signal Interface |
| Touch Interface | | Ethernet to act as USB for touch |
| Other Interfaces | | Audio Input and Output |
| Power Connector | | DC with Ring Attachment (Optional DC Terminal Block) |
| Power Info | Power Supply | External Power Adapter 100-240V, 50-60HZ |
| | Monitor Input Voltage | 12-24V |
| | Monitor Power | ≤35W |
| | Dustproof and Waterproof | Front Panel IP65 Dustproof and Waterproof |
| | Installation Method | Embedded,Desktop,Wall-mounted,VESA ARM Optional |
| | Ambient Temperature | <80%,Non-condensable |
| | Working Temperature | -20°C~70°C |
| Language Menu | Chinese,English,German,French,Korean, Spanish,Italian,Russian,Customized | |