

**WEWA AG**  
**WEWA-TV®**  
get in touch



## Digital Signage Display

Product Catalog

**WEWA AG**  
Industriegebiet Kolkmannskamp 10  
44879 Bochum  
Tel.: +49 (0)234 8903874-0  
[info@wewa.de](mailto:info@wewa.de)



# CONTENTS

---

One-stop Digital Signage Solutions

*Page 3-4 Freestanding Digital Signage Display*

*Page 5-6 Interactive Table-Design Kiosk System*

*Page 7-8 Vehicle-Mounted Digital Signage Display*

*Page 9-10 Smarthpone Design Wall Mounting Display*

*Page 11-13 Close-Frame / Open-Frame Wall Mount Design*

*Page 14-15 Streched Display*

*Page 16-17 LCD Video Wall Display*

*Page 18-21 Semi-Outdoor Display*

*Page 22-27 Outdoor Display with IP65 Grade*

*Page 28-29 Desktop Interactive Display*

*Page 30-33 Ultra Slim Free Standing LCD Monitor*

*Page 34-40 OEM / ODM Customized Products*



# Freestanding Digital Signage Display

Optional size: 21.5"/32"/43"/49"/55"/65"/75"



## Application

- Security
- Transportation
- ATM Machine
- Medical Equipment
- Gaming Machine
- Networking POS
- General Application

## Design/Material

- 22"-75" Optional
- Tempered Glass Protection
- Aluminum Frame With Silver Color
- 40mm Thickness Design
- Infrared Touch/Capacitive Touch Optional

## 4 function selections




### AZ / Android Network Display

- a. Android 7.1/8.1/9.0 operating system optional
- b. RK 3288 / RK 3399 optional
- c. 2GB/4GB RAM (DDR3) optional
- d. 8GB/16GB/32GB/64GB flash optional
- e. 4G(optional)/WLAN/WiFi network connection
- f. 802.11 B/G/N Internal WiFi
- g. Portrait/landscape display mode
- h. 1080P display output
- i. Remote management software (CMS) optional



### PC / All-in-one Windows Display

- a. CPU: Intel® Celeron® Processor J1900 /Intel® Core® Processor i3/i5/i7
- b. Chipset: Intel Bay Trail SOC /intel® H310 Chipset
- c. System memory: 4GB/8GB RAM, 120GB/240GB SSD
- d. Input connectors: VGA/HDMI/USB/RJ45/Audio
- e. Operating system: Windows 7/8/10, Linux
- f. Preinstall Intel OS service optional

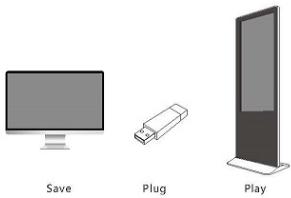

### C / Plug And Play Advertising Display

- a. Support picture, music and video to 1080P
- b. Support SD/HDMI/USB input
- c. Support SD card plug and play automatically
- d. USB update function: update documents by USB drive to SD card
- e. Support connecting with media player box/PC by HDMI input
- f. Playlist function: auto play the designated file at the specific date
- g. Timer function: 5 groups timers to turn on/off at the designated time
- h. Slideshow functions to play music and pictures at the same time
- i. Portrait/landscape display mode
- j. Scrolling text with different color and effect

### M / LCD Monitor

- a. Professional design for 7-24 hours operation
- b. DP/HDMI/VGA inputs
- c. Full HD resolution supported
- d. Support connecting with media player box/PC by HDMI input

## PANEL SPECIFICATIONS

Panel Model	21.5inch TFT LED	32inch TFT LED	43inch TFT LED	49inch TFT LCD	55inch TFT LED	65 inch TFT LED
Max Resolution	1920x1080	1920x1080	1920x1080	1920x1080	1920x1080	3840x2160
Aspect Ratio	16:9	16:9	16:9	16:9	16:9	16:9
Pixel Pitch	0.24795/0.24795	0.36375x0.36375	0.4903x0.4903	0.53025x0.53025	0.63x0.63	0.372x0.372
Viewing Angle	89/89/89/89	89/89/89/89	89/89/89/89	89/89/89/89	89/89/89/89	89/89/89/89
Contrast Ratio	1000:1	1400:1	1200:1	1000:1	1400:1	1400:1
Brightness	250cd/m <sup>2</sup>	500cd/m <sup>2</sup>	500cd/m <sup>2</sup>	500cd/m <sup>2</sup>	500cd/m <sup>2</sup>	500cd/m <sup>2</sup>
Response Time	14ms	6.5ms	26ms	12ms	6ms	13ms
Display Area (mm)	476.064x267.786mm <sup>2</sup> 98.4x392.85	941.184x592.416	1073.78x604	1209.6x680.4	1428.48x803.52	
Panel Size(mm)	495.6x292.2x10.7mm <sup>2</sup> 27.4x429x227	973x565.6x29	1096.2x632.5x29	1244.6x720.9x27	1459.2x830x16	
Screen Weight	2Kg	4.8Kg	11Kg	18Kg	17.5Kg	22.7Kg
Lamp Type	WLED	WLED	WLED	WLED	WLED	WLED
Machine Weight	21.3KG	45.3KG	53KG	86.7KG	95.2KG	98KG
Dimensions(mm)	1562.5x40x350	1734x65x511	1784x65x639	1834x65x714	1884x65x790	1940x69x1000
Speaker Type	10Wx2pcs	10Wx2pcs	10Wx2pcs	10Wx2pcs	10Wx2pcs	10Wx2pcs
Consumption	25 W	40 W	70 W	93 W	115 W	230 W
Power Input	AC100-240V	AC100-240V	AC100-240V	AC100-240V	AC100-240V	AC100-240V
Media Players	Android System / Windows System / Plug&play System / Monitor					
Mechanical	Cabinet Material	Surface: Tempered glass Body: Metal case; Side Frame: Aluminum; Base: Metal				
	Touch	IR Touch / Capacitive (PCAP) Touch				
Extended function	Motion Sensor	Optional				
	High Brightness	Normal/500nits/1000nits/1500nits/2000nits optional				
Accessories	Remote Control, Power supply, User manual, Keys, Tools and Screws					





## Interactive Table-Design Kiosk System

Optional size: 21.5"/24"/32"/43"/49"/55"/65"



Optional size: 32"/43"/49"/55"/65"



Optional size: 32"/43"/49"/55"/65"



### Application

- Security
- Transportation
- ATM
- Medical Equipment
- Gaming Machine
- Networking POS
- General Application

### Design/Material

- 22"-65" Optional
- Screen And Stand Could Be Removable
- Metal Case Material With White Painting/Aluminum Frame With Silver Color
- Tempered Glass Protection




## AZ / Android Network Display

- a. Android 7.1/8.0/9.0 operating system optional
- b. RK 3288 / RK 3399 optional
- c. 2GB/4GB RAM (DDR3) optional
- d. 8GB/16GB/32GB/64GB flash optional
- e. 4G(optional)/WLAN/WiFi network connection
- f. 802.11 B/G/N Internal WiFi
- g. Portrait/landscape display mode
- h. 1080P display output
- i. Remote management software (CMS) optional



## PC / All-in-one Windows Display

- a. CPU: Intel® Celeron® Processor J1900 /Intel® Core® Processor i3/i5/i7
- b. Chipset: Intel Bay Trail SOC /intel® H310 Chipset
- c. System memory: 4GB/8GB RAM, 120GB/240GB SSD
- d. Input connectors: VGA/HDMI/USB/RJ45/Audio
- e. Operating system: Windows 7/8/10, Linux
- f. Preinstall Intel OS service optional

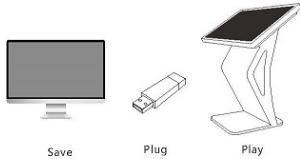

## C / Plug And Play Advertising Display

- a. Support picture, music and video to 1080P
- b. Support SD/HDMI/USB input
- c. Support SD card plug and play automatically
- d. USB update function: update documents by USB drive to SD card
- e. Support connecting with media player box/PC by HDMI input
- f. Playlist function: auto play the designated file at the specific date
- g. Timer function: 5 groups timers to turn on/off at the designated time
- h. Slideshow functions to play music and pictures at the same time
- i. Portrait/landscape display mode
- j. Scrolling text with different color and effect

## M / LCD Monitor

- a. Professional design for 7-24 hours operation
- b. DP/HDMI/VGA inputs
- c. Full HD resolution supported
- d. Support connecting with media player box/PC by HDMI input

## PANEL SPECIFICATIONS

Panel Model	21.5inch TFT LED	23.6inch TFT LCD	32inch TFT LED	43inch TFT LED	49inch TFT LCD	55inch TFT LED
Max Resolution	1920x1080	1920x1080	1920x1080	1920x1080	1920x1080	1920x1080
Aspect Ratio	16:9	16:9	16:9	16:9	16:9	16:9
Pixel Pitch	0.24795x0.24795	0.2715x0.2715	0.36375x0.36375	0.4903x0.4903	0.53025x0.53025	0.63x0.63
Viewing Angle	89/89/89/89	89/89/89/89	89/89/89/89	89/89/89/89	89/89/89/89	89/89/89/89
Contrast Ratio	1000:1	3000:1	1400:1	1200:1	1000:1	1400:1
Brightness	250cd/m <sup>2</sup>	250cd/m <sup>2</sup>	500cd/m <sup>2</sup>	500cd/m <sup>2</sup>	500cd/m <sup>2</sup>	500cd/m <sup>2</sup>
Response Time	14ms	10ms	6.5ms	26ms	12ms	6ms
Display Area (mm)	476.064x267.786mm <sup>2</sup>	21.28x293.22	698.4x392.85	941.184x592.416	1073.78x604	1209.6x604
Panel Size(mm)	495.6x292.2x10.7mm <sup>3</sup>	644.8x320.5x11.5	727.4x429x227	973x565.8x29	1096.2x632.5x29	1244.6x720.9x27
Screen Weight	2Kg	2.3Kg	4.8Kg	11Kg	18Kg	17.5Kg
Lamp Type	WLED	WLED	WLED	WLED	WLED	WLED
Machine Weight	7KG	10.3KG	17.2KG	30.4KG	36.5KG	58KG
Dimensions(mm)	550x65x340	710x55x475	775x70x470	1050x97x630	1150x95x675	1293x79x764
Speaker Type	10Wx2pcs	10Wx2pcs	10Wx2pcs	10Wx2pcs	10Wx2pcs	10Wx2pcs
Consumption	25 W	31 W	40 W	70 W	93 W	115 W
Power Input	AC100-240V	AC100-240V	AC100-240V	AC100-240V	AC100-240V	AC100-240V
Media Players	Android System / Windows System / Plug&play System / Monitor					
Mechanical	Cabinet Material: Body: Metal case, Base: Metal					
Extended function	Touch	IR Touch / Capacitive (PCAP) Touch				
Accessories	Motion Sensor: Optional High Brightness: Normal/500nits/1000nits/1500nits/2000nits optional Remote Control, Power supply, User manual, Keys, Tools and Screws					





Vehicle-Mounted Digital Signage Display



# Vehicle-Mounted Digital Signage Display

Optional size: 10.1"/12.1"/15.6"/19"/22"/32"



## Application

- Ceiling Mount Bus/Train/Taxi/Metro/Car Display
- Handrail Mount Bus/Train/Taxi/Metro/Car Display
- Network Transit TV
- In-Vehicles And Transportation

## Design/Material

- 10"-32" optional
- Ceiling Mount/Handrail Mount optional
- 9-36V power connection
- Shock-proof Function
- WLAN/WIFI/3G/4G/GPS/Camera, optional
- Tempered glass front of the screen
- Extended playing 0-999 minutes




## AZ / Android Network Display

- a. Android 7.1/8.1/9.0 operating system optional
- b. RK 3288 / RK 3399 optional
- c. 2GB/4GB RAM (DDR3) optional
- d. 8GB/16GB/32GB/64GB flash optional
- e. 4G(optional)/WLAN/WiFi network connection
- f. 802.11 B/G/N Internal WiFi
- g. Portrait/landscape display mode
- h. 1080P display output
- i. Remote management software (CMS) optional



## PC / All-in-one Windows Display

- a. CPU: Intel® Celeron® Processor J1900 /Intel® Core® Processor i3/i5/i7
- b. Chipset: Intel Bay Trail SOC /intel® H310 Chipset
- c. System memory: 4GB/8GB RAM, 120GB/240GB SSD
- d. Input connectors: VGA/HDMI/USB/RJ45/Audio
- e. Operating system: Windows 7/8/10, Linux
- f. Preinstall Intel OS service optional

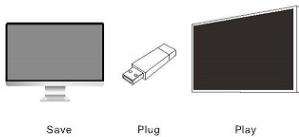

## C / Plug And Play Advertising Display

- a. Support picture, music and video to 1080P
- b. Support SD/HDMI/USB inputs
- c. Support SD card plug and play automatically
- d. USB update function: update documents by USB drive to SD card
- e. Support connecting with media player box/PC by HDMI input
- f. Playlist function: auto play the designated file at the specific date
- g. Timer function: 5 groups timers to turn on/off at the designated time
- h. Slideshow functions to play music and pictures at the same time
- i. Portrait/landscape display mode
- j. Scrolling text with different color and effect



## M / LCD Monitor

- a. Professional design for 7-24 hours operation
- b. DP/HDMI/VGA inputs
- c. Full HD resolution supported
- d. Support connecting with media player box/PC by HDMI input


PANEL SPECIFICATIONS							
Panel Model	10.1inch TFT LED	12.1inch TFT LED	15.6inch TFT LCD	19inch TFT LCD	21.5inch TFT LED	32inch TFT LED	32inch TFT LED
Max Resolution	1280x800	1280x800(WXGA)	1920x1080	1440x900	1920x1080	1920x1080	1920x1080
Aspect Ratio	16:10	16:10	16:9	16:10	16:9	16:9	16:9
Pixel Pitch	0.1659x0.1659	0.204x0.204	0.17925x0.17925	0.2835x0.2835	0.24795x0.24795	0.36375x0.36375	0.36375x0.36375
Viewing Angle	85/85/85/85	80/80/80/80	85/85/85/85	85/85/80/80	89/89/89/89	89/89/89/89	89/89/89/89
Contrast Ratio	1300:1	800:1	700:1	1000:1	1000:1	1400:1	1400:1
Brightness	350cd/m <sup>2</sup>	400cd/m <sup>2</sup>	300cd/m <sup>2</sup>	300cd/m <sup>2</sup>	250cd/m <sup>2</sup>	500cd/m <sup>2</sup>	500cd/m <sup>2</sup>
Response Time	25ms	35ms	25ms	5ms	14ms	6.5ms	
Display Area (mm)	216.96x135.60	261.12x163.2	344.16x193.59	408.24x255.15	476.06x267.786mm	698.4x392.85	
Panel Size(mm)	241.86x161.6x5.2	278x184x8.6	359.5x223.8x3.2	428x278x11	495.6x292.2x10.7mm	727.4x429x227	
Screen Weight	180g	550g	1.2kg	1.57Kg	2Kg	4.8Kg	
Lamp Type	WLED	WLED	WLED	WLED	WLED	WLED	
Machine Weight	3.7 KG	4.0KG	4.2 KG	4.7 KG	5.5 KG	15.5 KG	
Dimensions(mm)	315x230x80	330x235x50	405x265x60	485x315x60	560x340x65	790x460x70	
Speaker Type	5Wx2pcs	5Wx2pcs	5Wx2pcs	5Wx2pcs	5Wx2pcs	5Wx2pcs	
Consumption	12 W	15 W	16 W	22 W	25 W	46 W	
Power Input	DC 9-36V	DC 9-36V	DC 9-36V	DC 9-36V	DC 9-36V	DC 9-36V	
Media Players	Android System / Windows System / Plug&Display System / Monitor						
Mechanical	Cabinet Material: Body: Metal case; Side Frame: Aluminum; Cabinet material: Metal						
Mounting Bracket	Handrail mounting / Ceiling mounting						
	GPS Function						
Extended Function	Camera Function						
	3G Function						
Accessories	Remote Control, User manual, Keys, Tools and Screws						





# Smarthpone Design Wall Mounting Display

Optional size: 10.1"/19"/22"/32"/43"/49"/55"/65"

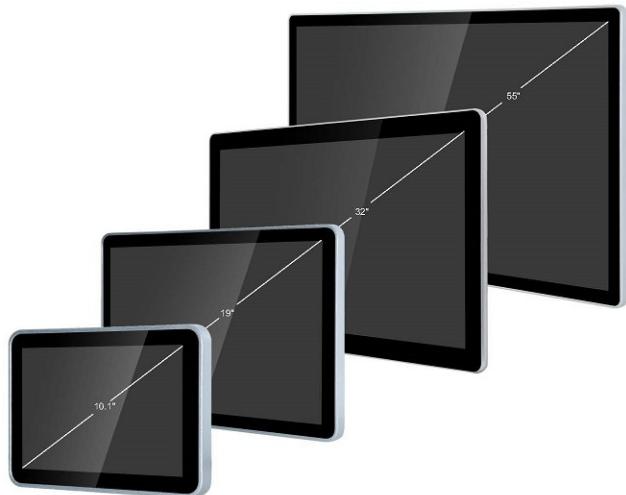

## Application

- POS
- Hotel
- Self-service Terminal
- Public Information Display
- Hospitality
- In-vehicle And Transportation

## Design/Material

- 10"-65" Optional
- Ultra-thin Style
- Tempered Glass Protection
- Aluminum Frame With Silver Color
- Rear With Metal Material
- Wall-mounting Bracket Optional




## AZ / Android Network Display

- a. Android 7.1/8.1/9.0 operating system optional
- b. RK 3288 / RK 3399 optional
- c. 2GB/4GB RAM (DDR3) optional
- d. 8GB/16GB/32GB/64GB flash optional
- e. 4G(optional)/WLAN/WiFi network connection
- f. 802.11 B/G/N Internal WiFi
- g. Portrait/landscape display mode
- h. 1080P display output
- i. Remote management software (CMS) optional



## PC / All-in-one Windows Display

- a. CPU: Intel® Celeron® Processor J1900 /Intel® Core® Processor i3/i5/i7
- b. Chipset: Intel Bay Trail SOC /intel® H310 Chipset
- c. System memory: 4GB/8GB RAM, 120GB/240GB SSD
- d. Input connectors: VGA/HDMI/USB/RJ45/Audio
- e. Operating system: Windows 7/8/10, Linux
- f. Preinstall Intel OS service optional

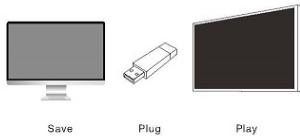

## C / Plug And Play Advertising Display

- a. Support picture, music and video to 1080P
- b. Support SD/HDMI/USB input
- c. Support SD card plug and play automatically
- d. USB update function: update documents by USB drive to SD card
- e. Support connecting with media player box/PC by HDMI input
- f. Playlist function: auto play the designated file at the specific date
- g. Timer function: 5 groups timers to turn on/off at the designated time
- h. Slideshow functions to play music and pictures at the same time
- i. Portrait/landscape display mode
- j. Scrolling text with different color and effect



## M / LCD Monitor

- a. Professional design for 7-24 hours operation
- b. DP/HDMI/VGA inputs
- c. Full HD resolution supported
- d. Support connecting with media player box/PC by HDMI input

PANEL SPECIFICATIONS						
Panel Model	10.1inch TFT LED	19inch TFT LCD	21.5inch TFT LED	32inch TFT LED	43inch TFT LED	55inch TFT LED
Max Resolution	1280x800	1440x900	1920x1080	1920x1080	1920x1080	1920x1080
Aspect Ratio	16:10	16:10	16:9	16:9	16:9	16:9
Pixel Pitch	0.1659x0.1659	0.2835x0.2835	0.24795x0.24795	0.36375x0.36375	0.4903x0.4903	0.63x0.63
Viewing Angle	85/85/85/85	85/85/80/80	89/89/89/89	89/89/89/89	89/89/89/89	89/89/89/89
Contrast Ratio	1300:1	1000:1	1000:1	1400:1	1200:1	1400:1
Brightness	350cd/m <sup>2</sup>	250cd/m <sup>2</sup>	250cd/m <sup>2</sup>	500cd/m <sup>2</sup>	500cd/m <sup>2</sup>	500cd/m <sup>2</sup>
Response Time	25ms	5ms	14ms	6.5ms	26ms	6ms
Display Area (mm)	216.96x135.60	408.24x255.15	476.064x267.786mm	698.4x392.85	941.184x592.416	1209.6x680.4
Panel Size(mm)	241.86x161.6x5.2	428x278x11	495.6x292.2x10.7mm	27.4x429x227	973x565.8x29	1244.6x720.9x27
Screen Weight	180g	1.57Kg	2Kg	4.8Kg	11Kg	17.5Kg
Lamp Type	WLED	WLED	WLED	WLED	WLED	WLED
Machine Weight	1.7KG	4.8KG	6.5KG	13.6KG	25KG	45KG
Dimensions(mm)	270x190x50	465x310x52	540x330x70	775x475x80	1020x615x80	1295x765x100
Speaker Type	5Wx2pcs	5Wx2pcs	5Wx2pcs	10Wx2pcs	10Wx2pcs	10Wx2pcs
Consumption	12 W	22 W	25 W	40 W	70 W	115 W
Power Input	DC 12V	DC 12V	AC100-240V	AC100-240V	AC100-240V	AC100-240V
VESA Mounting	75X75mm	100X100mm	100X100mm	300X300mm	400X400mm	400X400mm
Media Players	Android System / Windows System / Plug&play System / Monitor					
Mechanical	Cabinet Material: Body: Metal case; Side Frame: Aluminum					
	Touch: IR Touch / Capacitive (PCAP) Touch					
Extended Function	Motion Sensor: Optional					
Accessories	High Brightness: Normal/500nits/1000nits/1500nits/2000nits optional					
	Accessories: Remote Control, Power supply, User manual, Keys, Tools and Screws					







Close- Frame / Open-Frame Wall Mount Design



## Close-Frame / Open-Frame Wall Mount Design

Optional size: 10.1"/12.1"/19"/22"/24"/27"/32"/43"/49"/55"/65"/75"/86"/98"

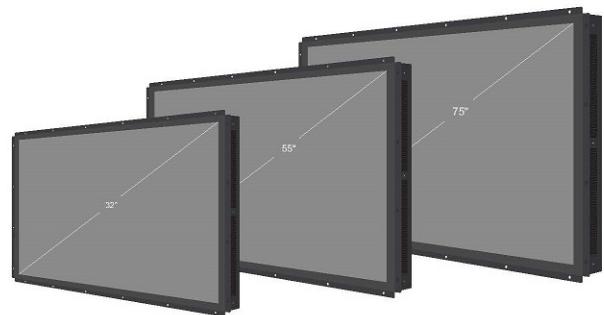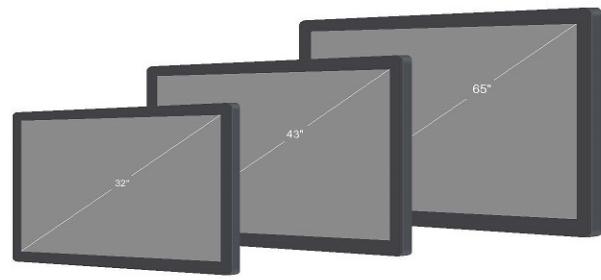

### Application

- POS
- Hotel
- Self-service Terminal
- Public Information Display
- Hospitality
- In-vehicle And Transportation

### Design/Material

- 10"-98" Optional
- Close Frame Design
- Wall-mounting Bracket Optional
- Color Optional
- Rear With Metal Material




## AZ / Android Network Display

- a. Android 7.1/8.1/9.0 operating system optional
- b. RK 3288 / RK 3399 optional
- c. 2GB/4GB RAM (DDR3) optional
- d. 8GB/16GB/32GB/64GB flash optional
- e. 4G(optional)/WLAN/WiFi network connection
- f. 802.11 B/G/N Internal WiFi
- g. Portrait/landscape display mode
- h. 1080P display output
- i. Remote management software (CMS) optional



## PC / All-in-one Windows Display

- a. CPU: Intel® Celeron® Processor J1900 /Intel® Core® Processor i3/i5/i7
- b. Chipset: Intel Bay Trail SOC /intel® H310 Chipset
- c. System memory: 4GB/8GB RAM, 120GB/240GB SSD
- d. Input connectors: VGA/HDMI/USB/RJ45/Audio
- e. Operating system: Windows 7/8/10, Linux
- f. Preinstall Intel OS service optional

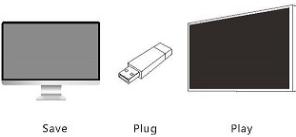

## C / Plug And Play Advertising Display

- a. Support picture, music and video to 1080P
- b. Support SD/HDMI/USB input
- c. Support SD card plug and play automatically
- d. USB update function: update documents by USB drive to SD card
- e. Support connecting with media player box/PC by HDMI input
- f. Playlist function: auto play the designated file at the specific date
- g. Timer function: 5 groups timers to turn on/off at the designated time
- h. Slideshow functions to play music and pictures at the same time
- i. Portrait/landscape display mode
- j. Scrolling text with different color and effect



## M / LCD Monitor

- a. Professional design for 7-24 hours operation
- b. DVI/HDMI/VGA inputs
- c. Full HD resolution supported
- d. Support connecting with media player box/PC by HDMI input

PANEL SPECIFICATIONS					
Panel Model	10.1inch TFT LED	12.1inch TFT LED	15.6inch TFT LCD	17inch TFT LCD	18.5inch TFT LCD
Max Resolution	1280x800	1280x800(WXGA)	1920x1080	1280x1024	1366x768
Aspect Ratio	16:10	16:10	16:9	5:4	16:9
Pixel Pitch	0.1659x0.1659	0.204x0.204	0.17925x0.17925	0.264x0.264	0.300x0.300
Viewing Angle	85/85/85/85	80/80/65/80	85/85/85/85	88/88/88/88	89/89/89/89
Contrast Ratio	1300:1	800:1	700:1	1000:1	1000:1
Brightness	350cd/m <sup>2</sup>	400cd/m <sup>2</sup>	300cd/m <sup>2</sup>	400cd/m <sup>2</sup>	300cd/m <sup>2</sup>
Response Time	25ms	35ms	25ms	30ms	14ms
Display Area (mm)	216.96x135.60	261.12x163.2	344.16x193.59	337.92x270.336	409.8x230.4
Panel Size(mm)	241.86x161.6x5.2	278x184x8.6	359.5x223.8x3.2	358.5x296.5x13.4	430.4x254.6x7.8
Screen Weight	180G	550G	1.2KG	1.27KG	1.29KG
Lamp Type	WLED	WLED	WLED	WLED	WLED
Machine Weight	0.9KG	1.8KG	3.3KG	4.1KG	4.8KG
Dimensions(mm)	246x168x32.5	301x203x44	344x268x51	429x319x45	465x315x50
Speaker Type	5Wx2pcs	5Wx2pcs	5Wx2pcs	5Wx2pcs	5Wx2pcs
Consumption	12 W	15 W	16 W	17 W	18 W
Power Input	DC 12V	DC 12V	DC 12V	DC 12V	DC 12V
VESA Mounting	75x75mm	75x75mm	75x75mm	75x75mm	100x100mm
Media Players	Android System / Windows System / Plug&play System / Monitor				
Mechanical	Cabinet Material	Body: Metal case			
	Touch	IR Touch / Capacitive (PCAP) Touch			
Extended Function	Motion Sensor	Optional			
	High Brightness	Normal 500nits/1000nits/1500nits/2000nits optional			
Accessories	Remote Control, Power supply, User manual, Keys, Tools and Screws				



#### PANEL SPECIFICATIONS

Panel Model	19inch TFT LCD	21.5inch TFT LED	23.8inch TFT LED	27inch TFT LED	32inch TFT LED	43inch TFT LED	
Max Resolution	1440x900	1920x1080	1920x1080	1920x1080	1920x1080	1920x1080	
Aspect Ratio	16:10	16:09	16:9	16:09	16:09	16:09	
Pixel Pitch	0.2835x0.2835	0.24795x0.24795	0.2745x0.2745	0.31125x0.31125	0.36375x0.36375	0.4903x0.4903	
Viewing Angle	85/85/80/80	89/89/89/89	89/89/89/89	85/85/80/80	89/89/89/89	89/89/89/89	
Contrast Ratio	1000:1	1000:1	1000:1	1200:1	1400:1	1200:1	
Brightness	250cd/m²	250cd/m²	250cd/m²	300cd/m²	500cd/m²	500cd/m²	
Response Time	5ms	14ms	15ms	12ms	6.5ms	26ms	
Display Area (mm)	408.24x255.15	476.06x267.786mm	527.04x296.46	597.6x336.15	698.4x392.85	941.184x592.416	
Panel Size(mm)	428x278x11	495.6x292.2x10.7mm	543x317.4x11.6	630x368.2x15	727.4x429x227	973x565.8x29	
Screen Weight	1.57Kg	2Kg	2.27Kg	2.35Kg	4.8Kg	11Kg	
Lamp Type	WLED	WLED	WLED	WLED	WLED	WLED	
Machine Weight	3.6KG	4.5KG	5.9KG	6.2KG	9.4KG	23.4KG	
Dimensions(mm)	445x292x47.5	515x305x45	597x364x47.5	647.5x386x50	774.5x469x55.5	998.4x593x57.5	
Speaker Type	5Wx2pcs	5Wx2pcs	10Wx2pcs	10Wx2pcs	10Wx2pcs	10Wx2pcs	
Consumption	22 W	25 W	31 W	32 W	40 W	70 W	
Power Input	DC 12V	DC12V	DC12V	AC100-240V	AC100-240V	AC100-240V	
VESA Mounting	100x100mm	100x100mm	100x100mm	100x100mm	300x300mm	400x400mm	
Media Players	Android System / Windows System / Plug&play System / Monitor						
Mechanical	Cabinet Material	Body: Metal case					
	Touch	IR Touch / Capacitive (PCAP) Touch					
Extended Function	Motion Sensor	Optional					
	High Brightness	Normal/500nits/1000nits/1500nits/2000nits optional					
Accessories	Remote Control, Power supply, User manual, Keys, Tools and Screws						




Close-Frame / Open-Frame Wall Mount Design

#### PANEL SPECIFICATIONS

Panel Model	49inch TFT LCD	55inch TFT LED	65 inch TFT LED	75 inch TFT LCD	86inch TFT LCD	98inch TFT LCD	
Max Resolution	1920x1080	1920x1080	3840x2160	3840x2160	3840x2160	3840x2160	
Aspect Ratio	16:09	16:09	16:09	16:09	16:09	16:09	
Pixel Pitch	0.53025x0.53025	0.63x0.63	0.372x0.372	0.4296x0.4296	0.4935x0.4935	0.5622x0.5622	
Viewing Angle	89/89/89/89	89/89/89/89	89/89/89/89	89/89/89/89	89/89/89/89	89/89/89/89	
Contrast Ratio	1000:1	1400:1	1400:1	1200:1	1200:1	1300:1	
Brightness	500cd/m²	500cd/m²	500cd/m²	500cd/m²	500cd/m²	500cd/m²	
Response Time	12ms	6ms	13ms	8ms	8ms	8ms	
Display Area (mm)	1073.78x604	1209.6x680.4	1428.4x803.52	1649.66x927.936	1855.04x1065.96	2158.85x1214.35	
Panel Size(mm)	1096.2x632.5x29	1244.6x720.9x27	1459.2x830x16	1675.2x953.6x11.9	1922.2x1093.2x13.6	2187.8x1242.8x68.6	
Screen Weight	18Kg	17.5Kg	22.7Kg	36Kg	39.9Kg	59Kg	
Lamp Type	WLED	WLED	WLED	WLED	WLED	WLED	
Machine Weight	30.1KG	30.9KG	50KG	73.5KG	156KG	200KG	
Dimensions(mm)	1227x662x85	1269.5x749x62	1495x870x72.5	1635x960x70	1946x1132.5x75	2238x1293x135	
Speaker Type	10Wx2pcs	10Wx2pcs	10Wx2pcs	10Wx2pcs	10Wx2pcs	10Wx2pcs	
Consumption	98 W	115 W	230 W	370 W	500 W	550 W	
Power Input	AC100-240V	AC100-240V	AC100-240V	AC100-240V	AC100-240V	AC100-240V	
VESA Mounting	400x400mm	400x400mm	400x400mm	600x300x300mm	600x300x300mm	600x300x300mm	
Media Players	Android System / Windows System / Plug&play System / Monitor						
Mechanical	Cabinet Material	Body: Metal case					
	Touch	IR Touch / Capacitive (PCAP) Touch					
Extended Function	Motion Sensor	Optional					
	High Brightness	Normal/500nits/1000nits/1500nits/2000nits optional					
Accessories	Remote Control, Power supply, User manual, Keys, Tools and Screws						




Page 13

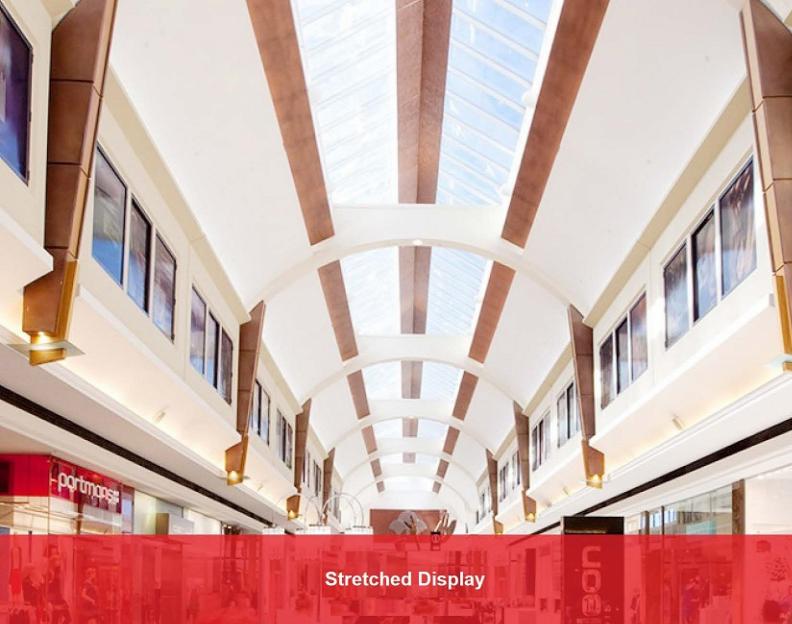

## Stretched Display

Optional size: 14.9"/19.1"/23.1"/28.8"/38"/57.2"

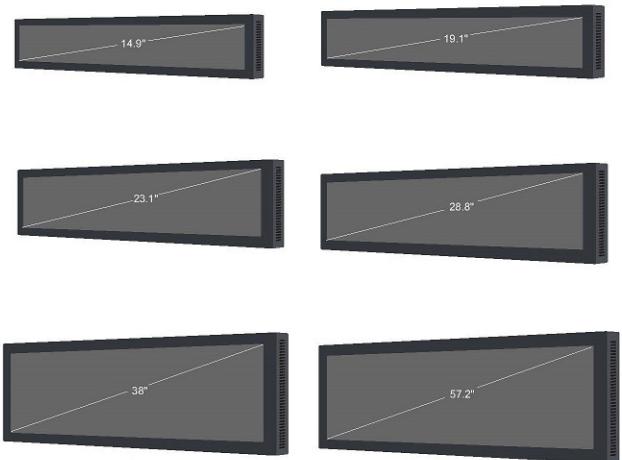

### Application

- POS
- Hotel
- Self-service Terminal
- Supermarket
- Public Information Display
- Hospitality
- In-vehicles And Transportation

### Design/Material


- 14.9"-57.2" Optional
- Close Frame Design
- Wall-mounting Bracket Optional
- Color Optional
- Rear With Metal Material

3 function selections



### AZ / Android Network Display

- a. Android 7.1/8.1/9.0 operating system optional
- b. RK 3288 / RK 3399 optional
- c. 2GB/4GB RAM (DDR3) optional
- d. 8GB/16GB/32GB/64GB flash optional
- e. 4G(optional)/WLAN/WiFi network connection
- f. 802.11 B/G Internal WiFi
- g. Portrait/landscape display mode
- h. 1080P display output
- i. Remote management software (CMS) optional

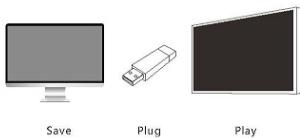

### K / Plug And Play Advertising Display

- a. Support picture, music and video to 1080P
- b. Support SD/HDMI/USB inputs
- c. Support SD card plug and play automatically
- d. USB update function: update documents by USB drive to SD card
- e. Support connecting with media player box/PC by HDMI input
- f. Playlist function: auto play the designated file at the specific date
- g. Timer function: 5 groups timers to turn on/off at the designated time
- h. Slideshow functions to play music and pictures at the same time
- i. Portrait/landscape display mode
- j. Scrolling text with different color and effect



### M / LCD Monitor

- a. Professional design for 7-24 hours operation
- b. DVI/HDMI/VGA inputs
- c. Full HD resolution supported
- d. Support connecting with media player box/PC by HDMI input

### KEY FEATURES



- Ultra Stretch Design
- Close Frame/ Open Frame Design
- 75x75/100x100 Vesa mounting holes
- Color Optional
- Splitter screen playback

### PANEL SPECIFICATIONS

Panel Model	14.9inch TFT LCD	19inch TFT LCD	23.1inch TFT LCD	38inch TFT LED	57.2 inch TFT LED
Max Resolution	1280x800	1920x1080	1920x1200	1920x1080	1920x1080
Aspect Ratio	>3:1	>3:1	3:1	<16:9	>5:2
Pixel Pitch	0.282x0.282	0.2482x0.2482	0.10167x0.305	0.1615x0.4845	0.0744x0.744
Viewing Angle	70/70/50/70	85/85/80/80	88/88/88/88	88/88/88/88	89/89/89/89
Contrast Ratio	500:1	1000:1	3000:1	3000:1	500:1
Brightness	400cd/m <sup>2</sup>	700cd/m <sup>2</sup>	500cd/m <sup>2</sup>	700cd/m <sup>2</sup>	700cd/m <sup>2</sup>
Response Time	30ms	5ms	9.5ms	8ms	10ms
Display Area (mm)	360.94x109.98	476.64x84.405 mm	587.6 x 48.19	919.3x258	1429x272.2
Panel Size(mm)	407.5x136 x20.5	495.6x108.5x11	597.4x60.4x14.5mm	972x304x29.6	1470x314.2x29
Screen Weight	890g	1.78Kg	0.435kg	5kg	10Kg
Lamp Type	WLED	WLED	WLED	WLED	WLED
Machine Weight	2.3 KG	2.5 KG	0.335 KG	9.8 KG	11 KG
Dimensions(mm)	420x40x170	521.5x44x129	597.4x15x80.4	1077.5x60x345.5	1478x67x322.2
Speaker Type	5Wx2pcs	5Wx2pcs	5Wx2pos	5Wx2pos	5Wx2pos
Consumption	15 W	41 W	4.1 W	46 W	60 W
Power Input	DC12V	DC12V	DC12V	DC12V	DC12V
VESA Mounting	75x75mm	75x75mm		400x400mm	400x400mm
Media Players	Android System / Plug&play System / Monitor				
Mechanical	Cabinet Material	Body: Metal case			
Accessories	Remote Control, Power supply, User manual, Keys, Tools and Screws				



# LCD Video Wall Display



LCD Video Wall Display




Monitors connect together to form a video wall

**■** LCD Video wall solutions provide for all-in-one, easy-to-configure solution that is ideal for dynamic digital signage, information display and command & control applications.

Our Video wall panels make your digital signage easy to implement, configure and operate. Video wall displays support an extensive array of connectivity options, including VGA, DVI, HDMI, Composite, and supports RS-232 Serial connectivity for multiple display control. The ultra-thin bezel (4mm) make these displays appear nearly seamless for video walls consisting of up to 250 displays. Our video wall software allows you to change, reposition and resize content in real time from a single PC or Media Player box. No matter where your display these screens you can be assured people will be captivated by your message.

Optional size: 46"/49"/55"

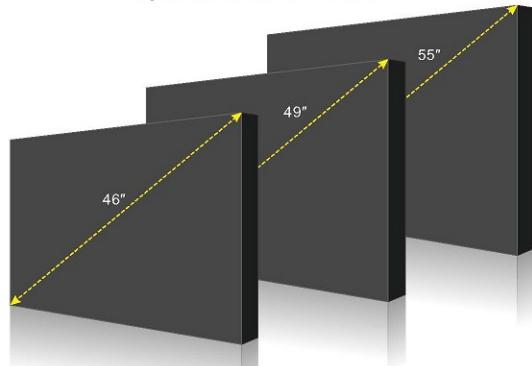

## ■ Application

- Hospitals
- Retail Stores
- Shopping Malls
- Supermarkets
- Museums and Galleries
- Airports

## ■ Design/Material

- 46"-55" Optional
- Slim Bezel design
- LG/Samsung LCD Panel
- 1920x1080 Full HD Resolution
- Artistic video wall software supported

## KEY FEATURES

### Super Narrow Bezel



Featuring an extremely narrow bezel width of 1.8mm/3.5mm/5.5 mm


2.25(Left/Top)/1.25mm(Right/Bottom)

### Auto Color Calibration



LCD video wall features an auto color calibration tool to ensure a uniform image across the entire tilted LCD display. The calibration sensor is placed on the screen and communicates with the video wall through either USB or RS232. It automatically adjusts the color and brightness to ensure all individual displays closely match.

### Create Dynamic Video Walls



video wall monitors can be joined together to build all kinds of multi-screen configurations. The feature of LCD monitor is easy to control and install, what are needed in order to produce a professional video wall display.

### Software Control



Connect and control your video wall from a central admin computer. Using display-based software to manage your network of displays from a single location via RJ45 and RS232. Easily identify your displays and fine-tune all display settings including brightness, contrast, saturation and sharpness.

### Comprehensive Set of Inputs



LCD video walls come with a full array of connectivity and control options including DVI, HDMI, VGA and RJ45, RS232 AV OUT and AV IN.

### Installation optional



video wall design allows you to mount any landscape or portrait video wall configuration with any number of screens, designed with the wall mount bracket, free standing type bracket optional. Which enables clients to find the cost-effective solution to fit their needs.

### PANEL SPECIFICATIONS

Panel Model	46" TFT-LCD	49" TFT-LCD	55" TFT-LCD	55" TFT-LCD
Aspect Ratio	16:9	16:9	16:9	16:9
Max Resolution	1920×1080	1920×1080	1920×1080	1920×1080
Display color	16.7M	16.7M	16.7M	16.7M
Chroma	97%	97%	97%	97%
Brightness	500/700cd/m <sup>2</sup>	500/700cd/m <sup>2</sup>	500/700cd/m <sup>2</sup>	500/700cd/m <sup>2</sup>
Brightness Type	LED	LED	LED	LED
Seam(mm)	≤3.5mm	≤1.8mm ≤3.5mm	≤1.8mm ≤3.5mm	≤1.7mm
Contrast	3000:1	3000:1	3000:1	3000:1
Visual Angle	178°/178°	178°/178°	178°/178°	178°/178°
Response Time	8ms	8ms	8ms	8ms
Life(hrs)	>50,000(hr)	>50,000(hr)	>50,000(hr)	>50,000(hr)
APPEARANCE				
Dimension (mm)	1024x122x579	1077.58x109.5x607.8	1211.4x111.7x682.2	1211.54x682.34x125.3
Color	Matte Black	Matte Black	Matte Black	Matte Black
Panel Material	Metal case SPCC	Metal case SPCC	Metal case SPCC	Metal case SPCC
Installation	Wall-mounted	Wall-mounted	Wall-mounted	Wall-mounted
POWER				
Power Supply		AC 100-240V 50/60Hz		
Power Consumption	≤220W	≤220W	≤20W	≤300W
Power Consumption (Max)	<5W	<5W	<5W	<5W
INTERFACE				
DVI 1 input	HDMI 1 input	VGA 1 input	CVBS 1 input & 1 output	RS232 1 input & 2 output
VIDEO			OSD display (screen menu display)	ON/OFF x1
Color System	PAL/NTSC/SECAM	Menu language	Chinese/English/ multiple language option required	



# Semi-Outdoor Display



Semi-Outdoor Display



## KEY FEATURES

### AG Glass with Anti-reflective Function



Anti-reflective AG glass can avoid interfere of ultraviolet radiation.

### Smart Fans for Cooling



Self-cooling solution, equip this display to handle a wide operating temperature range, from 0°C-35°C.

### Touch Options



Grid of Infrared light Photo Transistors


LCD Monitor could be with touch function, namely resistive, touch, Infrared Touch and capacitive options.

### Colour Options



Welcome different colors for the metal case.

### Sunlight Readable

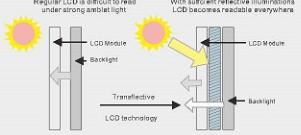

The high brightness outdoor displays with 2000nits, maintains high picture quality and image readability in an outdoor environments.

### Auto Brightness Sensor



Adjust before



Automatic adjustment

### Close-Frame/Open Frame Type Options



could provide OEM/ODM service, so monitor could be with close frame and open frame different design

### Brightness Options



1000nits 1500nits 2000nits 2500nits 3000nits 5000nits

## 19" Semi-Outdoor High Brightness LCD Monitor

1000 nits

### PANEL SPECIFICATIONS

Panel Model	19inch TFT LCD
Max Resolution	1440x900
Aspect Ratio	16:10
Pixel Pitch	0.2835x0.2835
Viewing Angle	85/85/80/80
Contrast Ratio	1000:1
Brightness	1000cd/m <sup>2</sup>
Response Time	5ms
Display Area (mm)	408.24x255.15
Panel Size(mm)	428x278x11
Screen Weight	1.57Kg
Lamp Type	WLED
Machine Weight	3.6KG
Dimensions(mm)	455x305x50
Speaker Type	5Wx2pcs
Consumption	54 W
Power Input	DC 12V
VESA Mounting	100x100mm

### CONNECTORS(Input)



HDMI	x2
VGA	x1
DP	x1
Audio	3.5mm Stereo Jack
ON/OFF	Switch x1

### ENVIRONMENTAL

Operating Temperature	0-50 degree
Storage Temperature	-65 degree


Operating Humidity	20%-80%Noncondensing
Storage Humidity	10%-90%Noncondensing

### MECHANICAL

Cabinet Material	Metal
Finish	Black
Mount	Wall mounting

### Features

- ※ 1440x900 resolution
- ※ 1000nits high brightness
- ※ DP / HDMI / VGA Input
- ※ Built in small fans for cooling
- ※ 75x75mm VESA holes
- ※ Sunlight readable function
- ※ Capacitive touch optional



1500 nits

### PANEL SPECIFICATIONS

Panel Model	23.8inch TFT LED
Max Resolution	1920x1080
Aspect Ratio	16:9
Pixel Pitch	0.2745x0.2745
Viewing Angle	89/89/89/89
Contrast Ratio	1000:1
Brightness	1500cd/m <sup>2</sup>
Response Time	15ms
Display Area (mm)	527.04x296.46
Panel Size(mm)	543x317.4x11.6
Screen Weight	2.27Kg
Lamp Type	WLED
Machine Weight	6.9KG
Dimensions(mm)	590x50x355
Speaker Type	10Wx2pcs
Consumption	67 W
Power Input	DC 12V
VESA Mounting	100x100mm

### CONNECTORS(Input)



HDMI	x2
VGA	x1
DP	x1
Audio	3.5mm Stereo Jack
ON/OFF	Switch x1

### ENVIRONMENTAL

Operating Temperature	0-50 degree
Storage Temperature	-65 degree

Operating Humidity	20%-80%Noncondensing
Storage Humidity	10%-90%Noncondensing

### MECHANICAL

Cabinet Material	Metal
Finish	Black
Mount	Wall mounting

### Features

- ※ 1920x1080 resolution
- ※ 1500nits high brightness
- ※ DP / HDMI / VGA Input
- ※ Built in small fans for cooling
- ※ 100x100mm VESA holes
- ※ Sunlight readable function
- ※ Capacitive touch optional

## 24" Semi-Outdoor High Brightness LCD Monitor



HDMI	x2
VGA	x1
DP	x1
Audio	3.5mm Stereo Jack
ON/OFF	Switch x1



## 32" Semi-Outdoor High Brightness LCD Monitor

1500 nits

### PANEL SPECIFICATIONS

Panel Model	32inch TFT LED
Max Resolution	1920x1080
Aspect Ratio	16:9
Pixel Pitch	0.36375x0.36375
Viewing Angle	89/89/89/89
Contrast Ratio	1400:1
Brightness	1500cd/m <sup>2</sup>
Response Time	6.5ms
Display Area (mm)	698.4x392.85
Panel Size(mm)	727.4x429x227
Screen Weight	4.8kg
Lamp Type	WLED
Machine Weight	21.5KG
Dimensions(mm)	754x47x451
Speaker Type	10Wx2pcs
Consumption	228 W
Power Input	AC100-240V
VESA Mounting	300x300mm

### CONNECTORS(Input)



### ENVIRONMENTAL


Operating Temperature	0-50 degree
Storage Temperature	-5-65 degree
Operating Humidity	20%-80%Noncondensing
Storage Humidity	10%-90%Noncondensing

### MECHANICAL

Cabinet Material	Metal
Finish	Black
Mount	Wall mounting

### Features

- ※ 1920x1080 resolution
- ※ 1500nits high brightness
- ※ DP / HDMI / VGA Input
- ※ Built in small fans for cooling
- ※ 200x200mm vesa holes
- ※ Sunlight readable function
- ※ Capacitive touch optional



1500 nits

### PANEL SPECIFICATIONS

Panel Model	49inch TFT LCD
Max Resolution	1920x1080
Aspect Ratio	16:9
Pixel Pitch	0.53025*0.53025
Viewing Angle	89/89/89/89
Contrast Ratio	1000:1
Brightness	1500cd/m <sup>2</sup>
Response Time	12ms
Display Area (mm)	1073.7x604
Panel Size(mm)	1096.2x632.5x29
Screen Weight	18kg
Lamp Type	WLED
Machine Weight	30.1KG
Dimensions(mm)	1227x85x662
Speaker Type	10Wx2pcs
Consumption	160 W
Power Input	AC100-240V
VESA Mounting	400x400mm

### CONNECTORS(Input)



### ENVIRONMENTAL


Operating Temperature	0-50 degree
Storage Temperature	-5-65 degree
Operating Humidity	20%-80%Noncondensing
Storage Humidity	10%-90%Noncondensing

### MECHANICAL

Cabinet Material	Metal
Finish	Black
Mount	Wall mounting

### Features

- ※ 1920x1080 resolution
- ※ 1500nits high brightness
- ※ DP / HDMI / VGA Input
- ※ Built in small fans for cooling
- ※ 200x200mm vesa holes
- ※ Sunlight readable function
- ※ Capacitive touch optional



## 55" Semi-Outdoor High Brightness LCD Monitor

1500 nits

### PANEL SPECIFICATIONS

Panel Model	55inch TFT LED
Max Resolution	1920x1080
Aspect Ratio	16:9
Pixel Pitch	0.63x0.63
Viewing Angle	89/89/89/89
Contrast Ratio	1400:1
Brightness	1500cd/m <sup>2</sup>
Response Time	6ms
Display Area (mm)	1209.6x680.4
Panel Size(mm)	1244.6x720.9
Screen Weight	17.5Kg
Lamp Type	WLED
Machine Weight	30.9KG
Dimensions(mm)	1269.5x627x49
Speaker Type	10Wx2pcs
Consumption	94 W
Power Input	AC100-240V
VESA Mounting	400x400mm

### CONNECTORS(Input)



### ENVIRONMENTAL


Operating Temperature	0-50 degree
Storage Temperature	0-65 degree
Operating Humidity	20%-80%Noncondensing
Storage Humidity	10%-90%Noncondensing

### MECHANICAL

Cabinet Material	Metal
Finish	Black
Mount	Wall mounting

### Features

- ⌘ 1920x1080 resolution
- ⌘ 1500nits high brightness
- ⌘ DP / HDMI / VGA Input
- ⌘ Built in small fans for cooling
- ⌘ 400x400mm vesa holes
- ⌘ Sunlight readable function
- ⌘ PCAP touch optional



2500 nits

### PANEL SPECIFICATIONS

Panel Model	86inch TFT LCD
Max Resolution	3840x2160
Aspect Ratio	16:9
Pixel Pitch	0.4935x0.4935
Viewing Angle	89/89/89/89
Contrast Ratio	1200:1
Brightness	2500cd/m <sup>2</sup>
Response Time	8ms
Display Area (mm)	1895.0x1059.56
Panel Size(mm)	1922.2x1093.2x13.6
Screen Weight	39.9Kg
Lamp Type	WLED
Machine Weight	156KG
Dimensions(mm)	1946x1132.5x75
Speaker Type	10Wx2pcs
Consumption	500 W
Power Input	AC100-240V
VESA Mounting	600x300x300mm

### CONNECTORS(Input)



### ENVIRONMENTAL



Operating Temperature	0-50 degree
Storage Temperature	0-65 degree
Operating Humidity	20%-80%Noncondensing
Storage Humidity	10%-90%Noncondensing

### MECHANICAL


Cabinet Material	Metal
Finish	Black
Mount	Wall mounting

### Features

- ⌘ 3840x2160 resolution
- ⌘ 2500nits high brightness
- ⌘ HDMI Input
- ⌘ Built in small fans for cooling
- ⌘ 600x300mm vesa holes
- ⌘ Sunlight readable



## 86" Semi-Outdoor High Brightness LCD Monitor





# Outdoor Display with IP65 Grade

## Excellent Visibility

### ④ High Brightness

outdoor display have high brightness of 4,000 cd/m<sup>2</sup> and antireflection glass, which delivers content clearly in the direct sunlight and catches the attention of viewers no matter where they are, achieve it to be excellent visibility.



## Strong Reliability

### ⑤ IP65 Design Protection

outdoor display with IP65 grade design and 24/7 for reliable operation. Which can support in any environment, sun, rain, snow, dust, etc.

### ⑥ Conformal Coating

The conformal coating protects the outdoor display against dust, iron powder and humidity, etc during maintenance.

### ⑦ Auto Brightness Control

The outdoor screen brightness can be automatically adjusted depending on the light.



## Strong Reliability

### Electrical Safety

outdoor display have electrical circuit breaker and surge suppressor. Which be sure absolute protection from overcurrent short circuits and unwanted voltages. Which helps prevent outdoor display damage and operator safety.



### Protective Glass

Outdoor display have 6mm tempered glass, with IK09/10 Endurance. Which prevent external damage and enables efficient repair.




### Supported Operating Temperature

Unique technology on LCD panel provides excellent reliability under a wide range of operating temperatures.



### Unique Thermal Management


This unique thermal management technology efficiently cool down the heat generated during LCD panel operating and prevent the panel heating and damage in the direct sunlight.

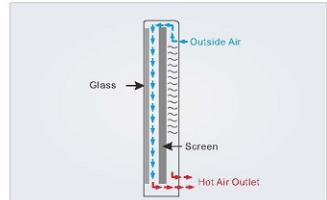

## Easy Management


### Door with Hydraulic stem

Open the door and access the internal conveniently.

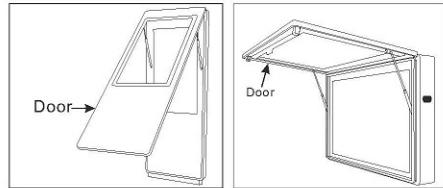

### Internal technology with OPS design

Flexible OPS module allows for an instant replacement on site.

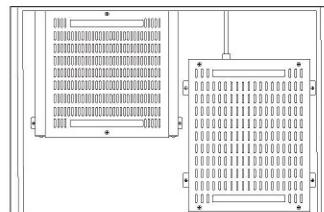

### CMS Software Control

CMS software can control and upload the contents on outdoor display remotely.



## 32" Wall Mounted Outdoor Sunlight Readable Display

4000 nits

### PANEL SPECIFICATIONS

Panel Model	32inch TFT LED
Max Resolution	1920x1080
Aspect Ratio	16:9
Pixel Pitch	0.36375x0.36375
Viewing Angle	89/89/89/89
Contrast Ratio	1400:1
Brightness	4000cd/m <sup>2</sup>
Response Time	6.5ms
Display Area (mm)	698.4x392.85
Panel Size(mm)	727.4x429x27
Screen Weight	4.8Kg
Lamp Type	WLED
Machine Weight	96.3KG
Dimensions(mm)	900x365x15
Speaker Type	10Wx2pcs
Consumption	280 W
Power Input	AC100-240V

### CONNECTORS(Input)

DP	x1
HDMI	x1
VGA	x1
Audio	3.5mm Stereo Jack
ON/OFF	

### ENVIRONMENTAL


Auto Cooling System	yes
Auto Heating System	yes
AG Glass Anti-UV Film	yes
Temperature Operation	-20°C ~ 60°C
IP Protection	IP65

### MECHANICAL

Cabinet Material	Metal
Finish	Outdoor Powder

### Features

- ※ 1920x1080 resolution
- ※ 4000nits high brightness
- ※ DP / HDMI / VGA Input
- ※ Aircon for cooling and heating system
- ※ Sunlight readable and dustproof function
- ※ IP 65 waterproof function

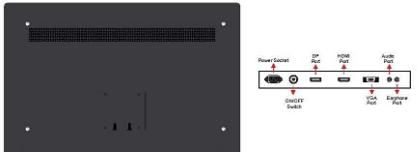

4000 nits

### PANEL SPECIFICATIONS

Panel Model	55inch TFT LED
Max Resolution	1920x1080
Aspect Ratio	16:9
Pixel Pitch	0.63x0.63
Viewing Angle	89/89/89/89
Contrast Ratio	1400:1
Brightness	4000cd/m <sup>2</sup>
Response Time	6ms
Display Area (mm)	1209.6x680.4mm
Panel Size(mm)	1244.6x720.9mm
Screen Weight	15Kg
Lamp Type	WLED
Machine Weight	230KG
Dimensions(mm)	1420x200x885
Speaker Type	10Wx2pcs
Consumption	530W
Power Input	AC100-240V

### CONNECTORS(Input)

DP	x1
HDMI	x1
VGA	x1
Audio	3.5mm Stereo Jack
ON/OFF	

### ENVIRONMENTAL

Auto Cooling System	yes
Auto Heating System	yes
AG Glass Anti-UV Film	yes
Temperature Operation	-20°C ~ 60°C
IP Protection	IP65


### MECHANICAL

Cabinet Material	Metal
Finish	Outdoor Powder

### Features

- ※ 1920x1080 resolution
- ※ 4000nits high brightness
- ※ DP / HDMI / VGA Input
- ※ Aircon for cooling and heating system
- ※ Sunlight readable and dustproof function
- ※ IP 65 waterproof function

## 55" Wall Mounted Outdoor Sunlight Readable Display

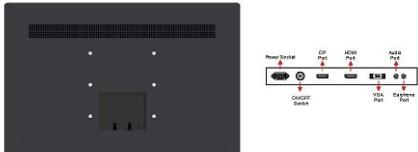

## 65" Wall Mount Outdoor Sunlight Readable Display

4000 nits

### PANEL SPECIFICATIONS

Panel Model	65 inch TFT LED
Max Resolution	3840x2160
Aspect Ratio	16:9
Pixel Pitch	0.372x0.372
Viewing Angle	89/89/89/89
Contrast Ratio	1400:1
Brightness	4000cd/m <sup>2</sup>
Response Time	13ms
Display Area (mm)	1428.48x803.52
Panel Size(mm)	1459.2x830x16
Screen Weight	22.7kg
Lamp Type	WLED
Machine Weight	198KG
Dimensions(mm)	1640x265x965
Speaker Type	10Wx2pcs
Consumption	620 W
Power Input	AC100-240V

### CONNECTORS(Input)

DP	x1
HDMI	x1
VGA	x1
Audio	3.5mm Stereo Jack
ON/OFF	

### ENVIRONMENTAL


Auto Cooling System	yes
Auto Heating System	yes
AG Glass Anti-UV Film	yes
Temperature Operation	-20°C ~ 60°C
IP Protection	IP65

### MECHANICAL

Cabinet Material	Metal
Finish	Outdoor Powder

### Features

- ※ 3840x2160 resolution
- ※ 4000nits high brightness
- ※ HDMI Input
- ※ Built in strong fans for cooling
- ※ Sunlight readable and dustproof function
- ※ IP65 waterproof function



4000 nits

### PANEL SPECIFICATIONS

Panel Model	86inch TFT LCD
Max Resolution	3840x2160
Aspect Ratio	16:9
Pixel Pitch	0.4935x0.4935
Viewing Angle	89/89/89/89
Contrast Ratio	1200:1
Brightness	4000cd/m <sup>2</sup>
Response Time	8ms
Display Area (mm)	1895.0x1065.96
Panel Size(mm)	1922.2x1093.2x16.14
Screen Weight	42Kg
Lamp Type	WLED
Machine Weight	198KG
Dimensions(mm)	1640x265x965
Speaker Type	10Wx2pcs
Consumption	1100 W
Power Input	AC100-240V

### CONNECTORS(Input)

DP	x1
HDMI	x1
VGA	x1
Audio	3.5mm Stereo Jack
ON/OFF	

### ENVIRONMENTAL

Auto Cooling System	yes
Auto Heating System	yes
AG Glass Anti-UV Film	yes
Temperature Operation	-20°C ~ 60°C
IP Protection	IP65

### MECHANICAL

Cabinet Material	Metal
Finish	Outdoor Powder

### Features

- ※ 3840x2160 resolution
- ※ 4000nits high brightness
- ※ HDMI Input
- ※ Built in strong fans for cooling
- ※ Sunlight readable and dustproof function
- ※ IP65 waterproof function

## 86" Wall Mount Outdoor Sunlight Readable Display

4000 nits

### PANEL SPECIFICATIONS

Panel Model	86inch TFT LCD
Max Resolution	3840x2160
Aspect Ratio	16:9
Pixel Pitch	0.4935x0.4935
Viewing Angle	89/89/89/89
Contrast Ratio	1200:1
Brightness	4000cd/m <sup>2</sup>
Response Time	8ms
Display Area (mm)	1895.0x1065.96
Panel Size(mm)	1922.2x1093.2x16.14
Screen Weight	42Kg
Lamp Type	WLED
Machine Weight	198KG
Dimensions(mm)	1640x265x965
Speaker Type	10Wx2pcs
Consumption	1100 W
Power Input	AC100-240V

### CONNECTORS(Input)

DP	x1
HDMI	x1
VGA	x1
Audio	3.5mm Stereo Jack
ON/OFF	

### ENVIRONMENTAL


Auto Cooling System	yes
Auto Heating System	yes
AG Glass Anti-UV Film	yes
Temperature Operation	-20°C ~ 60°C
IP Protection	IP65

### MECHANICAL

Cabinet Material	Metal
Finish	Outdoor Powder

### Features

- ※ 3840x2160 resolution
- ※ 4000nits high brightness
- ※ HDMI Input
- ※ Built in strong fans for cooling
- ※ Sunlight readable and dustproof function
- ※ IP65 waterproof function

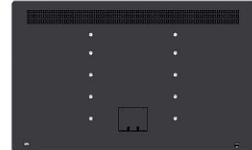

## 43" Freestanding Sunlight Readable Outdoor Display With IP65

4000 nits

### PANEL SPECIFICATIONS

Panel Model	43inch TFT LED
Max Resolution	1920x1080
Aspect Ratio	16:9
Pixel Pitch	0.4903x0.4903
Viewing Angle	89/89/89/89
Contrast Ratio	1200:1
Brightness	4000cd/m <sup>2</sup>
Response Time	26ms
Display Area (mm)	941.184x592.416
Panel Size(mm)	969x563.9x26
Screen Weight	9.5kg
Lamp Type	WLED
Machine Weight	140kg
Dimensions(mm)	1980x127x719
Speaker Type	10Wx2pcs
Consumption	240 W
Power Input	AC100-240V

### CONNECTORS(Input)

DP	x1
HDMI	x1
VGA	x1
Audio	3.5mm Stereo Jack
ON/OFF	

### ENVIRONMENTAL

Auto Cooling System	yes
Auto Heating System	yes
AG Glass Anti-UV Film	yes
Temperature Operation	-20°C + 60°C
IP Protection	IP65

### MECHANICAL

Cabinet Material	Metal
Finish	Outdoor Powder

### Features

- ※ 1920x1080 resolution
- ※ 4000nits high brightness
- ※ DP / HDMI / VGA Input
- ※ Built in fans for cooling
- ※ Sunlight readable and dustproof function
- ※ IP65 waterproof function



4000 nits

## 55" Freestanding Sunlight Readable Outdoor Display With IP65

### PANEL SPECIFICATIONS

Panel Model	55inch TFT LED
Max Resolution	1920x1080
Aspect Ratio	16:9
Pixel Pitch	0.63x0.63
Viewing Angle	89/89/89/89
Contrast Ratio	1400:1
Brightness	4000cd/m <sup>2</sup>
Response Time	8ms
Display Area (mm)	1209.6x680.4mm
Panel Size(mm)	1244.6x720.9mm
Screen Weight	17.5kg
Lamp Type	WLED
Machine Weight	188kg
Dimensions(mm)	2100x127x870mm
Speaker Type	10Wx2pcs
Consumption	450 W
Power Input	AC100-240V

### CONNECTORS(Input)

DP	x1
HDMI	x1
VGA	x1
Audio	3.5mm Stereo Jack
ON/OFF	

### ENVIRONMENTAL

Auto Cooling System	yes
Auto Heating System	yes
AG Glass Anti-UV Film	yes
Temperature Operation	-20°C + 60°C
IP Protection	IP65

### MECHANICAL

Cabinet Material	Metal
Finish	Outdoor Powder

### Features

- ※ 3840x2160 resolution
- ※ 4000nits high brightness
- ※ DP / HDMI / VGA Input
- ※ Built in fans for cooling
- ※ Sunlight readable and dustproof function
- ※ IP65 waterproof function



## 65" Freestanding Sunlight Readable Outdoor Display With IP65

4000 nits

### PANEL SPECIFICATIONS

Panel Model	65inch TFT LED
Max Resolution	3840*2160
Aspect Ratio	16:9
Pixel Pitch	0.372x0.372
Viewing Angle	89/89/89/89
Contrast Ratio	1400:1
Brightness	4000cd/m <sup>2</sup>
Response Time	13ms
Display Area (mm)	1428.48x803.52mm
Panel Size(mm)	1459.2x830x16mm
Screen Weight	22.7kg
Lamp Type	WLED
Machine Weight	288kg
Dimensions(mm)	2100x127x1000mm
Speaker Type	10Wx2pcs
Consumption	680 W
Power Input	AC100-240V

### CONNECTORS(Input)

DP	x1
HDMI	x1
VGA	x1
Audio	3.5mm Stereo Jack
ON/OFF	

### ENVIRONMENTAL

Auto Cooling System	yes
Auto Heating System	yes
AG Glass Anti-UV Film	yes
Temperature Operation	-20°C + 60°C
IP Protection	IP65

### MECHANICAL

Cabinet Material	Metal
Finish	Outdoor Powder

### Features

- ※ 3840x2160 resolution
- ※ 4000nits high brightness
- ※ HDMI Input
- ※ Built in fans for cooling
- ※ Sunlight readable and dustproof function
- ※ IP65 waterproof function



4000 nits

### PANEL SPECIFICATIONS

Panel Model	75inch TFT LED
Max Resolution	3840x2160
Aspect Ratio	16:9
Pixel Pitch	0.4296x0.4296
Viewing Angle	89/89/89/89
Contrast Ratio	1200 : 1
Brightness	2500cd/m <sup>2</sup>
Response Time	8ms
Display Area (mm)	1549.44x871.56mm
Panel Size(mm)	1758x993x45mm
Screen Weight	28.5kg
Lamp Type	WLED
Machine Weight	105KG
Dimensions(mm)	2480x352x1237.5
Speaker Type	10Wx2pcs
Consumption	680 W
Power Input	AC100-240V

### CONNECTORS(Input)

DP	x1
HDMI	x1
VGA	x1
Audio	3.5mm Stereo Jack
ON/OFF	

### ENVIRONMENTAL

Auto Cooling System	yes
Auto Heating System	yes
AG Glass Anti-UV Film	yes
Temperature Operation	-20°C + 60°C
IP Protection	IP65

### MECHANICAL

Cabinet Material	Metal
Finish	Outdoor Powder

### Features

- ※ 3840x2160 resolution
- ※ 4000nits high brightness
- ※ HDMI Input
- ※ Built in fans for cooling
- ※ Sunlight readable and dustproof function
- ※ IP65 waterproof function

## 75" Freestanding Sunlight Readable Outdoor Display With IP65





Desktop Interactive Display



## Desktop Interactive Display

Optional size: 10.1"/15.6"/22"



### Application

- Hotel
- The coffee shop
- Jewelry store
- checkstand
- The counter
- A stage

### Design/Material

- 10"-22" Optional
- Screen And Stand Could Be Removable
- Metal shell material
- Aluminum Frame With Silver Color
- Tempered Glass Protection




## AZ / Android Network Display

- a. Android 7.1/8.1/9.0 operating system optional
- b. RK 3288 / RK 3399 optional
- c. 2GB/4GB RAM (DDR3) optional
- d. 8GB/16GB/32GB/64GB flash optional
- e. 4G(optional)/WLAN/WiFi network connection
- f. 802.11 B/G/N Internal WiFi
- g. Portrait/landscape display mode
- h. 1080P display output
- i. Remote management software (CMS) optional



## PC / All-in-one Windows Display

- a. CPU: Intel® Celeron® Processor J1900 /Intel® Core® Processor i3/i5/i7
- b. Chipset: Intel Bay Trail SOC /intel® H310 Chipset
- c. System memory: 4GB/8GB RAM, 120GB/240GB SSD
- d. Input connectors: VGA/HDMI/USB/RJ45/Audio
- e. Operating system: Windows 7/8/10, Linux
- f. Preinstall Intel OS service optional

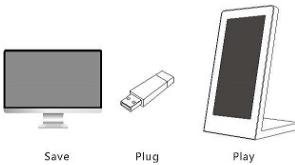

## C / Plug And Play Advertising Display

- a. Support picture, music and video to 1080P
- b. Support SD/HDMI/USB input
- c. Support SD card plug and play automatically
- d. USB update function: update documents by USB drive to SD card
- e. Support connecting with media player box/PC by HDMI input
- f. Playlist function: auto play the designated file at the specific date
- g. Timer function: 5 groups timers to turn on/off at the designated time
- h. Slideshow functions to play music and pictures at the same time
- i. Portrait/landscape display mode
- j. Scrolling text with different color and effect



## M / LCD Monitor

- a. Professional design for 7-24 hours operation
- b. DP/HDMI/VGA inputs
- c. Full HD resolution supported
- d. Support connecting with media player box/PC by HDMI input

## PANEL SPECIFICATIONS

Panel Model	21.5inch TFT LED	23.6inch TFT LCD	32inch TFT LED	43inch TFT LED	49inch TFT LCD	55inch TFT LED
Max Resolution	1920x1080	1920x1080	1920x1080	1920x1080	1920x1080	1920x1080
Aspect Ratio	16:9	16:9	16:9	16:9	16:9	16:9
Pixel Pitch	0.24795x0.24795	0.2715x0.2715	0.36375x0.36375	0.4903x0.4903	0.53025x0.53025	0.63x0.63
Viewing Angle	89/89/89/89	89/89/89/89	89/89/89/89	89/89/89/89	89/89/89/89	89/89/89/89
Contrast Ratio	1000:1	3000:1	1400:1	1200:1	1000:1	1400:1
Brightness	250cd/m <sup>2</sup>	250cd/m <sup>2</sup>	500cd/m <sup>2</sup>	500cd/m <sup>2</sup>	500cd/m <sup>2</sup>	500cd/m <sup>2</sup>
Response Time	14ms	10ms	6.5ms	26ms	12ms	6ms
Display Area (mm)	476.064x267.786	521.28x233.22	698.4x392.85	941.184x592.416	1073.78x604	1209.6x680.4
Panel Size(mm)	495.6x292.2x10.7	544.8x320.5x11.5	727.4x290x227	973x655.8x29	1096.2x632.5x29	1244.6x720.9x27
Screen Weight	2Kg	2.3kg	4.8Kg	11Kg	18Kg	17.5kg
Lamp Type	WLED	WLED	WLED	WLED	WLED	WLED
Machine Weight	7KG	10.3KG	17.2KG	30.4KG	36.5KG	58KG
Dimensions(mm)	550x65x340	710x55x475	775x70x470	1050x97x630	1150x95x675	1293x79x764
Speaker Type	10Wx2pcs	10Wx2pcs	10Wx2pcs	10Wx2pcs	10Wx2pcs	10Wx2pcs
Consumption	25 W	31 W	40 W	70 W	93 W	115 W
Power Input	AC100-240V	AC100-240V	AC100-240V	AC100-240V	AC100-240V	AC100-240V
Media Players	Android System / Windows System / Plug&play System / Monitor					
Mechanical	Cabinet Material	Body: Metal case; Base: Metal				
	Touch	IR Touch / Capacitive (PCAP) Touch				
Extended function	Motion Sensor	Optional				
	High Brightness	Normal/500nits/1000nits/1500nits/2000nits optional				
Accessories	Remote Control, Power supply, User manual, Keys, Tools and Screws					





Ultra Slim Free Standing LCD Monitor



## Ultra Slim Free Standing LCD Monitor

Optional size: 32"/43"/55"/65"/75"



### Application

- Security
- Transportation
- ATM Machine
- Medical Equipment
- Gaming Machine
- Networking POS
- General Application

### Design/Material

- 22"-75" Optional
- Tempered Glass Protection
- Aluminum Frame With Silver Color
- 40mm Thickness Design
- Infrared Touch/Capacitive Touch Optional




## AZ / Android Network Display

- a. Android 7.1/8.1/9.0 operating system optional
- b. RK 3288 / RK 3399 optional
- c. 2GB/4GB RAM (DDR3) optional
- d. 8GB/16GB/32GB/64GB flash optional
- e. 4G(optional)/WLAN/WiFi network connection
- f. 802.11 B/G/N Internal WiFi
- g. Portrait/landscape display mode
- h. 1080P display output
- i. Remote management software (CMS) optional



## PC / All-in-one Windows Display

- a. CPU: Intel® Celeron® Processor J1900 /Intel® Core® Processor i3/i5/i7
- b. Chipset: Intel Bay Trail SOC /intel® H310 Chipset
- c. System memory: 4GB/8GB RAM, 120GB/240GB SSD
- d. Input connectors: VGA/HDMI/USB/RJ45/Audio
- e. Operating system: Windows 7/8/10, Linux
- f. Preinstall Intel OS service optional

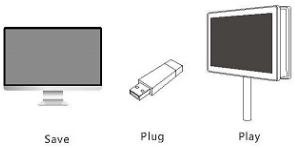

## C / Plug And Play Advertising Display

- a. Support picture, music and video to 1080P
- b. Support SD/HDMI/USB input
- c. Support SD card plug and play automatically
- d. USB update function: update documents by USB drive to SD card
- e. Support connecting with media player box/PC by HDMI input
- f. Playlist function: auto play the designated file at the specific date
- g. Timer function: 5 groups timers to turn on/off at the designated time
- h. Slideshow functions to play music and pictures at the same time
- i. Portrait/landscape display mode
- j. Scrolling text with different color and effect



## M / LCD Monitor

- a. Professional design for 7-24 hours operation
- b. D/P/HDMI/VGA inputs
- c. Full HD resolution supported
- d. Support connecting with media player box/PC by HDMI input

## PANEL SPECIFICATIONS

Panel Model	21.5inch TFT LED	23.6inch TFT LCD	32inch TFT LED	43inch TFT LED	49inch TFT LCD	55inch TFT LED					
Max Resolution	1920x1080	1920x1080	1920x1080	1920x1080	1920x1080	1920x1080					
Aspect Ratio	16:9	16:9	16:9	16:9	16:9	16:9					
Pixel Pitch	0.24795x0.24795	0.2715x0.2715	0.36375x0.36375	0.4903x0.4903	0.53025x0.53025	0.63x0.63					
Viewing Angle	89/89/89/89	89/89/89/89	89/89/89/89	89/89/89/89	89/89/89/89	89/89/89/89					
Contrast Ratio	1000:1	3000:1	1400:1	1200:1	1000:1	1400:1					
Brightness	250cd/m <sup>2</sup>	250cd/m <sup>2</sup>	500cd/m <sup>2</sup>	500cd/m <sup>2</sup>	500cd/m <sup>2</sup>	500cd/m <sup>2</sup>					
Response Time	14ms	10ms	6.5ms	26ms	12ms	6ms					
Display Area (mm)	476.064x267.786	521.28x293.22	698.4x392.85	941.184x592.416	1073.78x604	1209.6x804.0					
Panel Size(mm)	495.6x292.2x10.7	544.8x320.5x11.5	727.4x429x227	973x565.8x29	1096.2x632.5x29	1244.6x720.9x27					
Screen Weight	2Kg	2.3Kg	4.8Kg	11Kg	18Kg	17.5Kg					
Lamp Type	WLED	WLED	WLED	WLED	WLED	WLED					
Machine Weight	7KG	10.3KG	17.2KG	30.4KG	36.5KG	58KG					
Dimensions(mm)	550x65x340	710x55x475	775x70x470	1050x97x630	1150x95x675	1293x79x764					
Speaker Type	10Wx2pcs	10Wx2pcs	10Wx2pcs	10Wx2pcs	10Wx2pcs	10Wx2pcs					
Consumption	25 W	31 W	40 W	70 W	93 W	115 W					
Power Input	AC100-240V	AC100-240V	AC100-240V	AC100-240V	AC100-240V	AC100-240V					
Media Players	Android System / Windows System / Plug&play System / Monitor										
Mechanical	Cabinet Material Body: Metal case, Base: Metal										
	Touch	IR Touch / Capacitive (PCAP) Touch									
Extended function	Motion Sensor Optional										
Accessories	High Brightness Normal/500nits/1000nits/1500nits/2000nits optional Remote Control, Power supply, User manual, Keys, Tools and Screws										



## 24" Double-sided LCD Monitor for Gambling and Casino

### PANEL SPECIFICATIONS

Panel Model	23.6inch TFT LCD
Max Resolution	1920x1080
Aspect Ratio	16:9
Pixel Pitch	0.27150x0.2715
Viewing Angle	89/89/89/89
Contrast Ratio	3000:1
Brightness	250cd/m <sup>2</sup>
Response Time	10ms
Display Area (mm)	521.28x293.22
Panel Size(mm)	544.8x320.5x11.5
Screen Weight	2.3Kg
Lamp Type	WLED
Machine Weight	12 KG
Dimensions(mm)	562.5x103x326.5
Speaker Type	10Wx2pcs
Consumption	31 W
Power Input	DC12V

### CONNECTORS(Input)

DP	X1
HDMI	X1
VGA	X1
DC	X1
ON/OFF	X1

### MECHANICAL

Cabinet Material	Metal
Finish	Gold

### Features

- ※ Portrait and landscape are optional
- ※ the OEM model for casino
- ※ It can be designed to be double sided & single sided
- ※ And LED light design on the side is available for catching the clients eyes
- ※ Display with full HD resolution 1920\*1080
- ※ Providing viewing angle with 89/89/89/89
- ※ Heat dissipation design



### PANEL SPECIFICATIONS

Panel Model	23.8inch TFT LED
Max Resolution	1920x1080
Aspect Ratio	16:9
Pixel Pitch	0.2745x0.2745
Viewing Angle	89/89/89/89
Contrast Ratio	1000:1
Brightness	250cd/m <sup>2</sup>
Response Time	15ms
Display Area (mm)	527.04x296.46
Panel Size(mm)	543x317.4x11.6
Screen Weight	2.27Kg
Lamp Type	WLED
Machine Weight	8.6KG
Dimensions(mm)	590x65x370
Speaker Type	10Wx2pcs
Consumption	36 W
Power Input	AC100-240V

### CONNECTORS

USB 2.0	X4
HDMI (Output)	X1
AC	X1
RJ45	X1
VGA (Output)	X1
ON/OFF	X1

### MECHANICAL

Cabinet Material	Metal
Finish	White

### Features

- ※ CPU: Intel® Core® Processor, i3 5010U (Dual core four thread, 3M L3 Cache, 2.1GHz)
- ※ Chipset: Haswell-U
- ※ Graphic Card:Intel HD5500
- ※ Memory: 4GB RAM, 120G SSD
- ※ Audio: Realtek ALC882
- ※ Ethernet LAN: 1\*RTL8111E LAN
- ※ EPSON Brand 80mm Thermal Printer
- ※ Capacitive Touch

## 24" All In One Windows Display With 80mm Printer



## 55" Double Side Android OS LCD Kiosk

### PANEL SPECIFICATIONS

Panel Model	55inch TFT LED
Max Resolution	1920x1080
Aspect Ratio	16:9
Pixel Pitch	0.63x0.63
Viewing Angle	89/89/89/89
Contrast Ratio	1400:1
Brightness	500cd/m <sup>2</sup>
Response Time	6ms
Display Area (mm)	1209.6x680.4
Panel Size(mm)	1244.6x720.9x27
Screen Weight	17.5kg
Lamp Type	WLED
Machine Weight	30.9KG
Dimensions(mm)	1269.5x749x62
Speaker Type	10Wx2pcs
Consumption	115 W
Power Input	AC100-240V

### CONNECTORS

USB 2.0	X2
HDMI (Output)	X1
SD	X1
RJ45	X1
4G SIM (Optional)	X1
ON/OFF	X1

MECHANICAL	
Cabinet Material	Metal
Finish	Black

### Features

- ⌘. Android 7.1/8.1/9.0 operating system optional
- ⌘. RK 3268 / RK 3399 optional
- ⌘. 2GB/4GB RAM (DDR3) optional
- ⌘. 8GB/16GB/32GB/64GB flash optional
- ⌘. 4G(optional)/WLAN/WiFi network connection
- ⌘. 802.11 B/G/N Internal WiFi
- ⌘. Portrait/landscape display mode
- ⌘. 1080P display output
- ⌘. Remote management software (CMS) optional
- ⌘. Capacitive touch/I/R touch screen optional



## 55" Double Side Android OS LCD Kiosk

### PANEL SPECIFICATIONS

Panel Model	55inch TFT LED
Max Resolution	1920x1080
Aspect Ratio	16:9
Pixel Pitch	0.63x0.63
Viewing Angle	89/89/89/89
Contrast Ratio	1400:1
Brightness	500cd/m <sup>2</sup>
Response Time	6ms
Display Area (mm)	1209.6x680.4
Panel Size(mm)	1244.6x720.9x27
Screen Weight	17.5kg
Lamp Type	WLED
Machine Weight	30.9KG
Dimensions(mm)	1269.5x749x62
Speaker Type	10Wx2pcs
Consumption	115 W
Power Input	AC100-240V

### CONNECTORS

USB 2.0	X2
HDMI (Output)	X1
SD	X1
RJ45	X1
4G SIM (Optional)	X1
ON/OFF	X1

MECHANICAL	
Cabinet Material	Metal
Finish	White

### Features

- ⌘. Android 7.1/8.1/9.0 operating system optional
- ⌘. RK 3268 / RK 3399 optional
- ⌘. 2GB/4GB RAM (DDR3) optional
- ⌘. 8GB/16GB/32GB/64GB flash optional
- ⌘. 4G(optional)/WLAN/WiFi network connection
- ⌘. 802.11 B/G/N Internal WiFi
- ⌘. Portrait/landscape display mode
- ⌘. 1080P display output
- ⌘. Remote management software (CMS) optional
- ⌘. Capacitive touch/I/R touch screen optional



# OEM / ODM Customized Products



OEM / ODM

Customized Products


## Hardware Design



## LOGO Design



## OEM Color

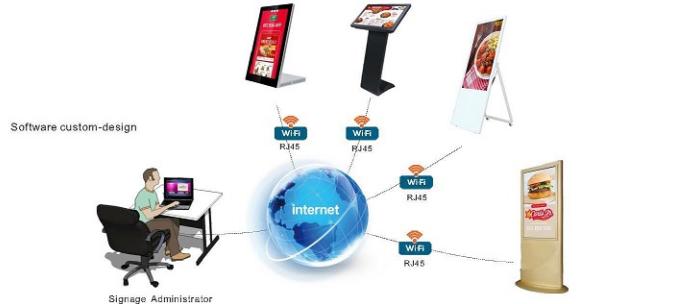

## 21.5"/32" Freestanding Touch Android LCD Display with Book Holder

### PANEL SPECIFICATIONS

Panel Model	21.5inch TFT LED
Max Resolution	1920x1080
Aspect Ratio	16:9
Pixel Pitch	0.24795x0.24795
Viewing Angle	89/89/89/89
Contrast Ratio	1000:1
Brightness	250cd/m <sup>2</sup>
Response Time	14ms
Display Area (mm)	476.064x267.786mm
Panel Size(mm)	495.6x292.2x10.7mm
Screen Weight	2Kg
Lamp Type	WLED
Machine Weight	24.5KG
Dimensions(mm)	1580x38x370
Speaker Type	10Wx2pcs
Consumption	25 W
Power Input	AC 100-240V

### CONNECTORS

USB 2.0	X2
HDMI (Output)	X1
SD	X1
RJ45	X1
4G SIM (Optional)	X1
ON/OFF	X1

### MECHANICAL

Cabinet Material	Metal
Finish	Black

### Features

- ※. Android 7.1/8.1/9.0 operating system optional
- ※. RK 3288 / RK 3399 optional
- ※. 2GB/4GB RAM (DDR3) optional
- ※. 8GB/16GB/32GB/64GB flash optional
- ※. 4G(optional)/WLAN/WiFi network connection
- ※. 802.11 B/G/N Internal WiFi
- ※. Portrait/landscape display mode
- ※. 1080P display output
- ※. Remote management software (CMS) optional
- ※. Capacitive touch
- ※. Newspaper shelves



### PANEL SPECIFICATIONS

Panel Model	23.8inch TFT LED
Max Resolution	1920x1080
Aspect Ratio	16:9
Pixel Pitch	0.2745x0.2745
Viewing Angle	89/89/89/89
Contrast Ratio	1000:1
Brightness	300cd/m <sup>2</sup>
Response Time	15ms
Display Area (mm)	527.04x296.46
Panel Size(mm)	543x317.4x11.6
Screen Weight	2.27Kg
Lamp Type	WLED
Machine Weight	19.3KG
Dimensions(mm)	707x41x475
Speaker Type	10Wx2pcs
Consumption	31 W
Power Input	AC 100-240V

### CONNECTORS

USB 2.0	X2
HDMI (Output)	X1
SD	X1
RJ45	X1
4G SIM (Optional)	X1
ON/OFF	X1

### MECHANICAL

Cabinet Material	Metal
Finish	White

## 24"/32" Android Capacitive Touch LCD Display



### Features

- ※. Android 7.1/8.1/9.0 operating system optional
- ※. RK 3288 / RK 3399 optional
- ※. 2GB/4GB RAM (DDR3) optional
- ※. 8GB/16GB/32GB/64GB flash optional
- ※. 4G(optional)/WLAN/WiFi network connection
- ※. 802.11 B/G/N Internal WiFi
- ※. Portrait/landscape display mode
- ※. 1080P display output
- ※. Remote management software (CMS) optional
- ※. Capacitive touch

## 24" All In One Windows Display With 80mm Printer

### PANEL SPECIFICATIONS

Panel Model	23.8inch TFT LED
Max Resolution	1920x1080
Aspect Ratio	16:9
Pixel Pitch	0.2745x0.2745
Viewing Angle	89/89/89/89
Contrast Ratio	1000:1
Brightness	250cd/m <sup>2</sup>
Response Time	15ms
Display Area (mm)	527.04x296.46
Panel Size(mm)	543x317.4x11.6
Screen Weight	2.27Kg
Lamp Type	WLED
Machine Weight	8.6KG
Dimensions(mm)	590x65x370
Speaker Type	10Wx2pcs
Consumption	36 W
Power Input	AC100-240V

### CONNECTORS

USB 2.0	X4
HDMI (Output)	X1
AC	X1
RJ45	X1
VGA (Output)	X1
ON/OFF	X1

### MECHANICAL

Cabinet Material	Metal
Finish	White

### Features

- ※ CPU: Intel® Core® Processor i3 5010U (Dual core four thread, 3M L3 Cache, 2.1GHz)
- ※ Chipset: Haswell-U
- ※ Graphic Card: Intel HD5500
- ※ Memory: 4GB RAM, 120G SSD
- ※ Audio: Realtek ALC882
- ※ Ethernet LAN: 1\*RTL8111E LAN
- ※ EPSON Brand 80mm Thermal Printer
- ※ Capacitive Touch



## 10.1" Wall Cabinet Android LCD Display with POE

### PANEL SPECIFICATIONS

Panel Model	10.1inch TFT LED
Max Resolution	1280x800
Aspect Ratio	16:10
Pixel Pitch	0.1659x0.1659
Viewing Angle	85/85/85/85
Contrast Ratio	1300:1
Brightness	350cd/m <sup>2</sup>
Response Time	25ms
Display Area (mm)	216.96x135.60
Panel Size(mm)	241.86x161.6x5.2
Screen Weight	180g
Lamp Type	WLED
Machine Weight	0.9KG
Dimensions(mm)	297.8x48x216.5
Speaker Type	5Wx2pcs
Consumption	12 W
Power Input	DC 12V

### CONNECTORS

USB 2.0	X2
HDMI (Output)	X1
SD	X1
RJ45	X1
4G SIM (Optional)	X1
ON/OFF	X1

### MECHANICAL

Cabinet Material	Metal
Finish	Black



### Features

- ※ 10.1" 1280x800 IPS panel
- ※ Android operating system
- ※ with POE
- ※ Embedded in wall
- ※ Tempered glass protection for the screen
- ※ Easy to get out of the wall

## 15.6"/21.5" Interactive Tablet Android Display

### PANEL SPECIFICATIONS

Panel Model	15.6inch TFT LCD	21.5inch TFT LED
Max Resolution	1920x1080	1920x1080
Aspect Ratio	16:9	16:9
Pixel Pitch	0.17925×0.17925	0.24795×0.24795
Viewing Angle	85/85/85/85	89/89/89/89
Contrast Ratio	700:1	1000:1
Brightness	300cd/m <sup>2</sup>	250cd/m <sup>2</sup>
Response Time	25ms	14ms
Display Area (mm)	344.16x193.59	476.064x267.786mm
Panel Size(mm)	359.5x223.8x3.2	495.6x292.2x10.7mm
Screen Weight	1.2kg	2Kg
Lamp Type	WLED	WLED
Machine Weight	21.1KG	23KG
Dimensions(mm)	1317x275x350	1373x330x400
Speaker Type	5Wx2pcs	5Wx2pcs
Consumption	15 W	25 W
Power Input	DC 12V	AC 100-240V

### CONNECTORS

USB 2.0	X2	X2
HDMI (Output)	X1	X1
SD	X1	X1
RJ45	X1	X1
4G SIM (Optional)	X1	X1
ON/OFF	X1	X1

MECHANICAL		
Cabinet Material	Metal	Metal
Finish	Black	Black

### Features

- ※. Android 7.1/8.1/9.0 operating system optional
- ※. RK 3268 / RK 3399 optional
- ※. 2GB/4GB RAM (DDR3) optional
- ※. 8GB/16GB/32GB/64GB flash optional
- ※. 4G(optional)/WLAN/WiFi network connection
- ※. 802.11 B/G/N Internal WiFi
- ※. Remote management software (CMS) optional
- ※. 10 Points Capacitive Touch



## 43" Ultra-thin Network LCD Digital Poster

### PANEL SPECIFICATIONS

Panel Model	43inch TFT LED
Max Resolution	1920x1080
Aspect Ratio	16:9
Pixel Pitch	0.4903×0.4903
Viewing Angle	89/89/89/89
Contrast Ratio	1200:1
Brightness	500cd/m <sup>2</sup>
Response Time	26ms
Display Area (mm)	941.184x592.416
Panel Size(mm)	973x565.8x29
Screen Weight	11Kg
Lamp Type	WLED
Machine Weight	23.4KG
Dimensions(mm)	998.4x593x57.5
Speaker Type	10Wx2pcs
Consumption	70 W
Power Input	AC100-240V

### CONNECTORS

USB 2.0	X2
HDMI (Output)	X1
SD	X1
RJ45	X1
4G SIM (Optional)	X1
ON/OFF	X1

MECHANICAL	
Cabinet Material	Metal
Finish	White

### Features

- ※. Android 7.1/8.1/9.0 operating system optional
- ※. RK 3268 / RK 3399 optional
- ※. 2GB/4GB RAM (DDR3) optional
- ※. 8GB/16GB/32GB/64GB flash optional
- ※. 4G(optional)/WLAN/WiFi network connection
- ※. 802.11 B/G/N Internal WiFi
- ※. Portrait/Landscape display mode
- ※. 1080P display output
- ※. Remote management software (CMS) optional
- ※. Capacitive touch/I/R touch screen optional



## 21.5" Android LCD Hand Sanitizer Display & Kiosk

### PANEL SPECIFICATIONS

Panel Model	21.5inch TFT LED
Max Resolution	1920x1080
Aspect Ratio	16:9
Pixel Pitch	0.24795x0.24795
Viewing Angle	89/89/89/89
Contrast Ratio	1000:1
Brightness	250cd/m <sup>2</sup>
Response Time	14ms
Display Area (mm)	476.064x267.788mm
Panel Size(mm)	495.6x292.2x10.7mm
Screen Weight	2Kg
Lamp Type	WLED
Machine Weight	23KG
Dimensions(mm)	940x320x620mm
Speaker Type	5Wx2pcs
Consumption	30 W
Power Input	AC 100-240V

### CONNECTORS

USB 2.0	X2
HDMI (Output)	X1
SD	X1
RJ45	X1
4G SIM (Optional)	X1
ON/OFF	X1

### MECHANICAL

Cabinet Material	Metal
Finish	Black / White

### Features

- ⌘ Android 7.1/8.1/9.0 operating system optional
- ⌘ RK 3268 / RK 3399 optional
- ⌘ 2GB/4GB RAM (DDR3) optional
- ⌘ 8GB/16GB/32GB/64GB flash optional
- ⌘ 4G (optional) WLAN/WiFi network connection
- ⌘ 802.11 B/G/N Internal WiFi
- ⌘ Portrait/Landscape display mode
- ⌘ 1080P display output
- ⌘ Remote management software (CMS) optional
- ⌘ 10 Points Capacitive Touch



## 21.5" /32" Self Order Service Kiosk

### PANEL SPECIFICATIONS

Panel Model	21.5inch TFT LED	32inch TFT LED
Max Resolution	1920x1080	1920x1080
Aspect Ratio	16:9	16:9
Pixel Pitch	0.24795x0.24795	0.36375x0.36375
Viewing Angle	89/89/89/89	89/89/89/89
Contrast Ratio	1000:1	1400:1
Brightness	250cd/m <sup>2</sup>	500cd/m <sup>2</sup>
Response Time	14ms	6.5ms
Display Area (mm)	476.064x267.788mm	698.4x392.85mm
Panel Size(mm)	495.6x292.2x10.7mm	727.4x429.2x227mm
Screen Weight	2Kg	4.8Kg
Lamp Type	WLED	WLED
Machine Weight	23KG	21.1KG
Dimensions(mm)	871.4x171.2x384.5	1115.7x135x529
Speaker Type	5Wx2pcs	5Wx2pcs
Consumption	30 W	40 W
Power Input	AC 100-240V	AC 100-240V

### CONNECTORS (Input)

VGA	X1	X1
HDMI	X2	X2
AC	X1	X1
ON/OFF	X1	X1

### MECHANICAL

Cabinet Material	Metal	Metal
Finish	Black / White	Black / White

### Features

- 32 inch Self Order Service Kiosk
- 1920x1080 resolution
- 89/89/89/89 viewing angle
- DP / HDMI / VGA optional
- 7.24" POS camera optional
- Standard 100x100MM Vesa Holes
- 2 High Quality Speakers
- Capacitive Touch
- Camera Optional
- Thermal Printer
- QR Reader Scanner
- POS



## 43" Double sided Android Network Digital Signage

### PANEL SPECIFICATIONS

Panel Model	43inch TFT LED
Max Resolution	1920x1080
Aspect Ratio	16:9
Pixel Pitch	0.4903x0.4903
Viewing Angle	89/89/89/89
Contrast Ratio	1200:1
Brightness	500cd/m <sup>2</sup>
Response Time	26ms
Display Area (mm)	941.184x592.416
Panel Size(mm)	973x565.8x29
Screen Weight	11Kg
Lamp Type	WLED
Machine Weight	23.4KG
Dimensions(mm)	1133.6x49.5x579
Speaker Type	5Wx2pcs
Consumption	70 W
Power Input	AC100-240V

### CONNECTORS

USB 2.0	X2
HDMI (Output)	X1
SD	X1
RJ45	X1
4G SIM (Optional)	X1
ON/OFF	X1

### MECHANICAL

Cabinet Material	Metal
Finish	Black / White

### Features

- ※. Android 7.1/8.1/9.0 operating system optional
- ※. RK 3288 / RK 3399 optional
- ※. 2GB/4GB RAM (DDR3) optional
- ※. 8GB/16GB/32GB/64GB flash optional
- ※. 4G(optional)/WLAN/WiFi network connection
- ※. 802.11 B/G/N Internal WiFi
- ※. Remote management software (CMS) optional
- ※. Capacitive touch/IR touch screen optional



## 23.6" LCD Screen

### PANEL SPECIFICATIONS


Panel Model	23.6 inch LCD
Max Resolution	848x648 35PPI
Aspect Ratio	1:1
Pixel Pitch	0.708x0.708
Viewing Angle	89/89/89/89
Contrast Ratio	4000:01:00
Brightness	700cd/m <sup>2</sup>
Response Time	1/8ms
Display Area (mm)	600.384(H)x600.384(V)
Panel Size(mm)	663.781x663.781mm
Screen Weight	TBD
Lamp Type	TFT-LCD
Machine Weight	21.5KG
Dimensions(mm)	800x760x63
Speaker Type	5Wx2pcs
Consumption	63 W
Power Input	AC100-240V

### CONNECTORS

USB 2.0	X1
HDMI (Input)	X1
DP	X2
ON/OFF	X1
MECHANICAL	
Cabinet Material	Metal
Finish	Black / White

### Features

- ※. Android 7.1/8.1/9.0 operating system optional
- ※. RK 3288 / RK 3399 optional
- ※. 2GB/4GB RAM (DDR3) optional
- ※. 8GB/16GB/32GB/64GB flash optional
- ※. 4G(optional)/WLAN/WiFi network connection
- ※. 802.11 B/G/N Internal WiFi
- ※. Portrait/landscape display mode
- ※. Remote management software (CMS) optional
- ※. Capacitive touch/IR touch screen optional

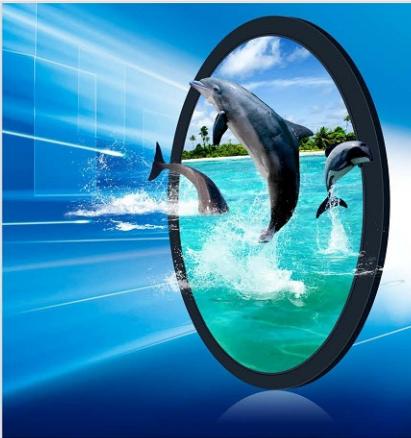

## Android Media Player Box

SPECIFICATION	
CPU	Rockchip RK3288 Quad Core
RAM	1/2GB DDR3
Flash	8GB Flash (up to 32GB)
Operating System	Android 7.1 / 8.1 / 9.0
Output Interface	HDMI
Audio	MP3,WMA,WAV,EAAC+, MP2 dec, Vorbis (Ogg), Ac3, FLAC, APE...
Video	H.264, MKV, WMV, MPEG 1/2/4, HD Divx, Xvid, RM/RMVB;
Photo Format	BMP/PNG/GIF/JPEG
Ethernet	10/100 MBps compatible interface
WiFi	802.11 a/b/g/n
USB	2*USB 2.0 Host
Card Reader	SD/MMC/3G Slim
Power Adaptor	12VDC
Consumption	8 W
Machine Weight	0.5KG
Dimensions(mm)	218x45x140
Packaging (mm)	430x372x325
INTERFACE DESCRIPTION	
1 HDMI Output	High-definition signal output
2 USB Host	Mouse connection
3 RJ45	Network connection
4 SD Card	Memory card MS,SD,MMC
5 4G Sim Card	Support 4G Sim card
6 Remote Sensor	Remote controller sensor



## Features


- ※. Android 7.1/8.1/9.0 operating system optional
- ※. RK 3288 / RK 3399 optional
- ※. 2GB/4GB RAM (DDR3) optional
- ※. 8GB/16GB/32GB/64GB Flash optional
- ※. 4G(optional)/WLAN/WiFi network connection
- ※. 802.11 B/G/N Internal WiFi
- ※. Remote management software (CMS) optional
- ※. 1080P display output



## 1080P HD Media Player Box

INPUT PORTS	
USB 2.0	x2
HDMI	x1
Built in 8GB Memory	
ACCESSORY	
Remote Controller	x1
Power Supply	x1
User's manual&Software	x1 CD Disk
Bracket	Optional
GENERAL INFORMATION	
Working Temp	0~50 degree
Certificates	CE/FCC/ROHS
EXTENDABLE FUNCTIONS	
Motion Sensor	Optional
Color	Optional
MECHANICAL	
Power Adaptor	12VDC
Consumption	8 W
Machine Weight	0.5KG
Dimensions(mm)	218x45x140
Packaging (mm)	430x372x325
SPECIFICATION	
Video Format	MPG, MPG-1, MPG-2, MPG-4, AVI, MP4, MOV, FLV, 3GP, M2TS, MKV, KVC, RMVB to 1080P
Audio/Picture Format	MP3 / BMP, PNG, GIF, JPEG
Memory Cards	No memory card need, built in 8GB Flash
Timer Function	Auto Power on/off
Auto-Copy	Auto-update content to built in 8GB Memory via USB drive
Playlist Function	Play specific file at specific time
Power Memory	Support program replaying from the setting time before the power failure
Slide Show	Support background music when playing picture
Scroll Caption	Support scrolling caption, effect index can be changed
Calendar & Time	Support check calendar, adjust time and display it on the screen on/off

OSD	Multi Languages
Picture	Picture
USB	USB
Memory	Memory
Remote	Remote
Control	Control
Display	Display
Setting	Setting
Time	Time



## Features

- ※. Support 1080P playback with HDMI output
- ※. Built in 8GB memory, no SD card need
- ※. Picture format: JPG, BMA, PNG
- ※. Video format: MP4, AVI, DAT, VOB, 3GP, MKV, MOV, FLV, MPG
- ※. Music format: MP3, Asc, Ac3, Dcm
- ※. Language support: Chinese/english
- ※. USB auto copy Function from USB to SD card
- ※. Timer, clock and playlist function

